
LAMARLED

At only 4" wide, the 44LWDI fits discretely into many architectural applications. It is suitable for continuous runs and offers a clean, unbroken look. This unit features an illuminated edge that adds a unique quality that most narrow linears do not have.

44LWDI 4x4 linear wall direct/indirect

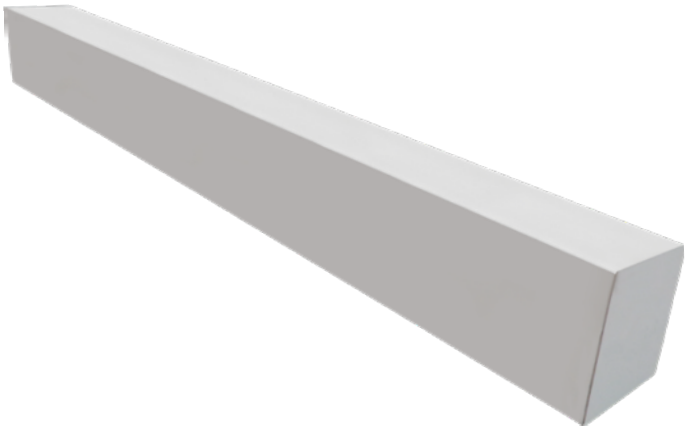

Features and Specifications:

Construction:

- Custom extruded diffuser offers high light transmission of over 85% with excellent LED diffusion, optional Crossblade Louver (replaces bottom lens)
- Precision fabricated steel housings are an economic alternative to extruded aluminum

Size Options:

- Available in 2', 4', 6' and 8' lengths (nominal)

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

Mounting Options:

- Wall mount

Driver:

- Universal voltage 120-277V standard
- Custom driver tuning available for specific lumen requirements
- 0-10V or Lutron dimming

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example **44LWDI48M35**

44LWDI

Series	Size	Power	CCT	General Options	Run Configuration
44LWDI = Wall	**24** = 2' nominal **36** = 3' nominal **48** = 4' nominal **72** = 6' nominal **96** = 8' nominal	**L** = Low **M** = Medium **H** = High	**80 CRI** **30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K **90 CRI** **930** = 3000K **935** = 3500K **940** = 4000K **950** = 5000K	**CBL** = Crossblade louver downlight (and top lens) **EM** = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory - 3'-8' only) **EMB** = BABA Compliant Emergency pack >90 min., >500 lumens **BLK** = Black metal construction **D** = 0-10V dimming to 1% (standard) **DTD** = 0-10V Dim to Dark **LDH** = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black **2C** = 2 circuit operation (1up/1down) (4'-8' only - no EM)	**Blank** = Individual **BOR** = Beginning of run (6' & 8' only) **EOR** = End of run (2'-8') **INT** = Intermediate (6' & 8' only)

Consult factory for additional options not shown or listed
Continuous runs shipped with feed thru wiring harness

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Project Information:

Job Name: _____ Fixture Type: _____

Catalog #: _____ Date: _____

Comments: _____


Certification & Listings:


LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com


44LWDI 4x4 linear wall


BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE


Dimensions

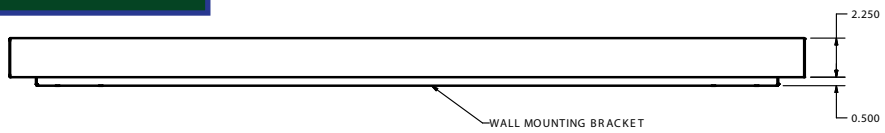

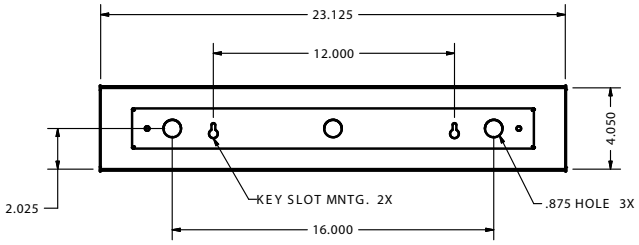

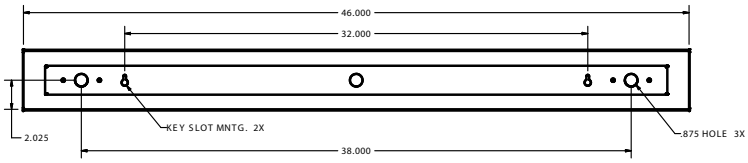

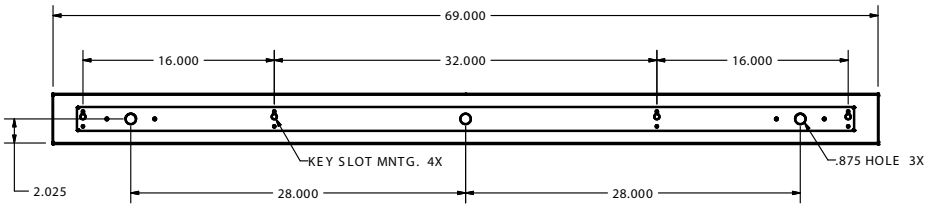

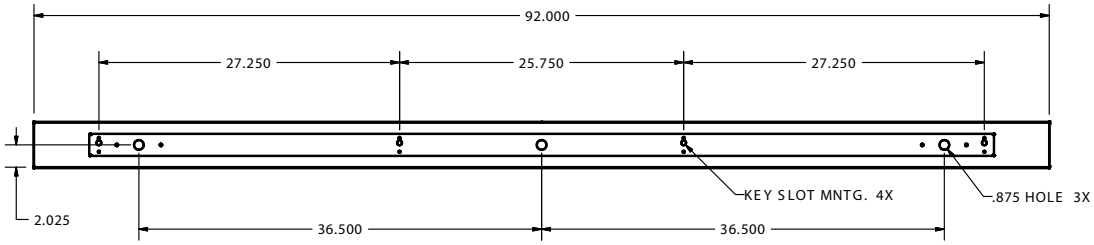

44LWDI Length Chart

Size	
2′	23.125″
4′	46″
6′	69″
8′	92″

LED Lumen/Wattage Chart - 4000K

44LWDI 4’

Low	Medium	High
47W	64W	100W
4432 Lu	5806 Lu	8331 Lu

Lumen Multipliers

3000K	.95
3500K	.97
5000K	1.03

LAMAR LED assumes no responsibility for misapplication of fixtures
Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 0826

LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com