
The 6x6 series is a narrow recessed LED luminaire ideal for perimeters, soffits, coves or other commercial applications where modern lighting may be utilized in grid, sheet-rock or concealed-z ceilings and can be mounted individually or in continuous rows.

66L-F / 66L-G / 66L-SG

6x6 flanged | grid | slot grid

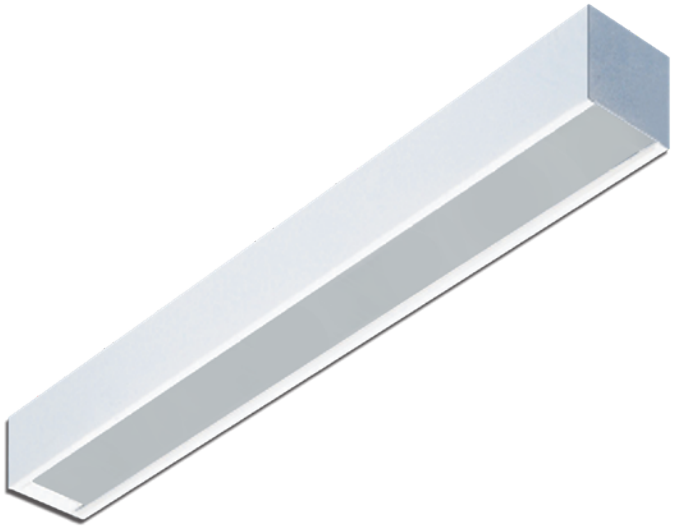

Features and Specifications:

Construction:

- Lugs and end °ange trims included with 66LF units
- Integral grid clips included with 66LG and 66LSG units
- Ample knockouts are provided on back and ends for convenient installation and continuous through wiring

Size Options:

- Available in 2', 4', 6' and 8' lengths (nominal)

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

Mounting Options:

- Recessed flanged or grid mount

Driver:

- Universal voltage 120-277V standard
- Custom driver tuning for specific lumen requirements
- 0-10V or Lutron dimming optional

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for dimensions

Ordering Guide / Example **66L48GLFA-40D**

66L

Series	Size	Mounting Options	Power	Lens Options	CCT	General Options
66L = 6x6	**24** = 2' nominal **48** = 4' nominal **72** = 6' nominal **96** = 8' nominal	**F** = Flanged for finished ceiling, sheetrock, plaster, concealed "Z" **G** = T-bar or grid ceiling **SG** = Slot grid T-bar ceiling	**L** = Low **M** = Medium **H** = High	**Blank** = leave blank for none **FA** = Frosted acrylic	**80 CRI** **30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K **90 CRI** **930** = 3000K **935** = 3500K **940** = 4000K **950** = 5000K	**EM** = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory) **EMB** = BABA Compliant Emergency pack >90 min., >500 lumens **D** = 0-10V dimming to 1% **DTD** = 0-10V Dim to Dark **LDH** = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black **AWNR** = Lutron Athena wireless node integral fixture control (RF only) **AWNS** = Lutron Athena wireless node integral fixture control (RF with daylight and occupancy sensing)

Consult factory for additional options not shown or listed

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Project Information:

Job Name: _____ Fixture Type: _____

Catalog #: _____ Date: _____

Comments: _____

Certification & Listings:

LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com


66L-F / 66L-G / 66L-SG

6x6 flanged | grid | slot grid


BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions


END VIEW

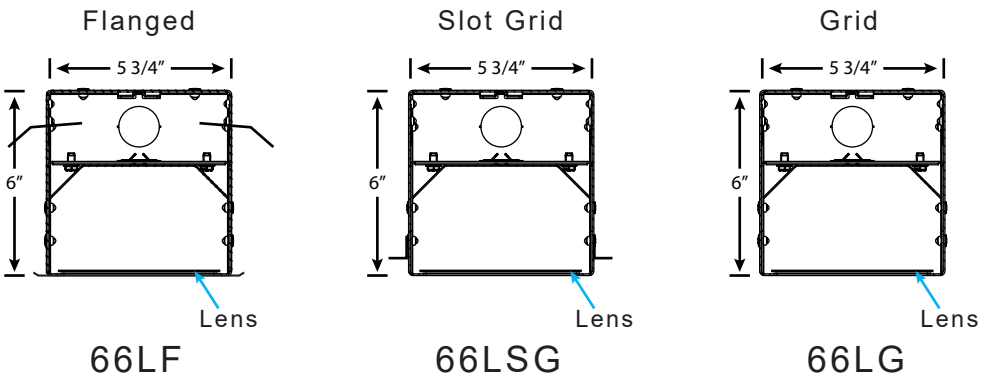


66L24F

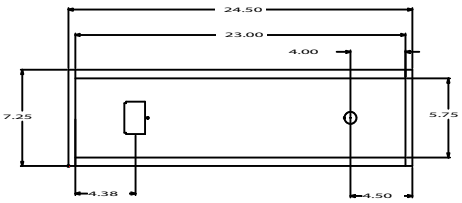


66L24G




66L48F

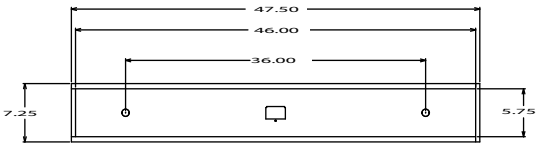


66L48G

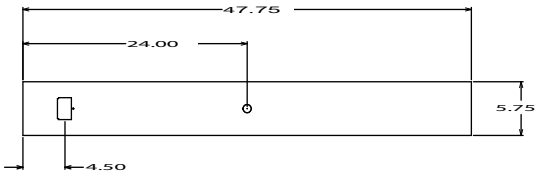


66L72F

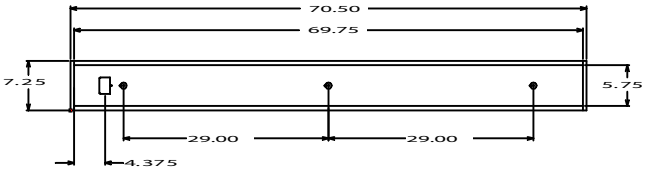


66L72G

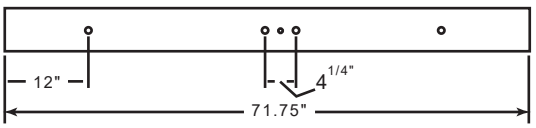

66L96F

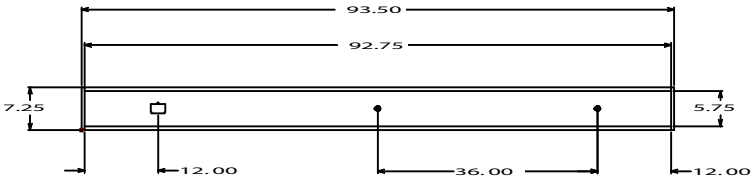

66L96G

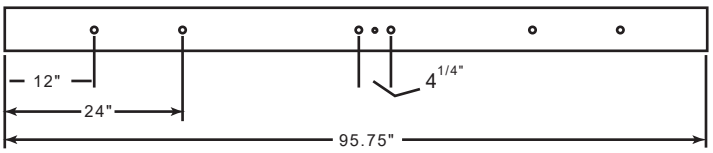

Lumen Chart - FA Lens - 4000K

	Low	Medium	High
2'	12W - 1364 lu	17W - 1790 lu	25W - 2599 lu
4'	24W - 2729 lu	33W - 3581 lu	50W - 5199 lu

LaMar LED assumes no responsibility for misapplication of ÿxtures
Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 0826