
66LS 6x6 linear direct surface/suspended

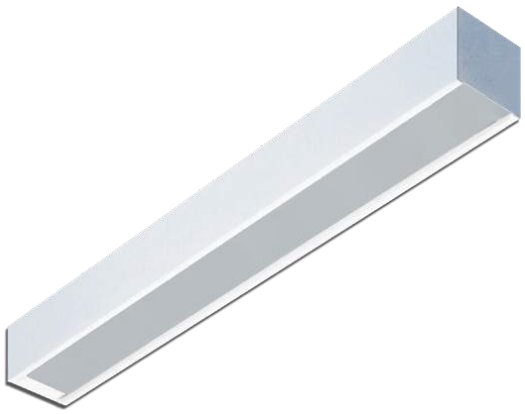

The 6x6 series is ideal for hallways, lobbies or other commercial applications where modern direct lighting may be utilized

Features and Specifications:

Construction:

- Bodies and ends are die form code gauge cold rolled steel for strength and uniformity
- Precision fabricated steel housings are an economic alternative to extruded aluminum
- Lift and shift frosted acrylic diffuser

Size Options:

- Available in 4', 6' and 8' lengths (nominal)

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

Mounting Options:

- Surface or cable mount (specify "AC" when ordering)

Driver:

- Universal voltage 120-277V standard
- Custom driver tuning available for specific lumen requirements
- 0-10V or Lutron dimming

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example

66LS48-40D

66LS				
Series	Size	Power	CCT	General Options
66LS = Direct surface/suspended	**48** = 4' nominal **72** = 6' nominal **96** = 8' nominal	**L** = Low **M** = Medium **H** = High	**80 CRI** **30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K **90 CRI** **930** = 3000K **935** = 3500K **940** = 4000K **950** = 5000K	**EM** = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory - 3'-8' only) **EMB** = BABA Compliant Emergency pack >90 min., >500 lumens **D** = 0-10V dimming to 1% (standard) **DTD** = 0-10V Dim to Dark **LDH** = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black **AC** = 4ft aircraft cable mount

Consult factory for additional options not shown or listed
4ft AC cable kits and pre-wired power drop included with -AC option, other lengths available - consult factory

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Project Information:

Job Name: _____ Fixture Type: _____

Catalog #: _____ Date: _____

Comments: _____

Certification & Listings:


LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com


66LS 6x64 linear direct surface/suspended

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

Top View

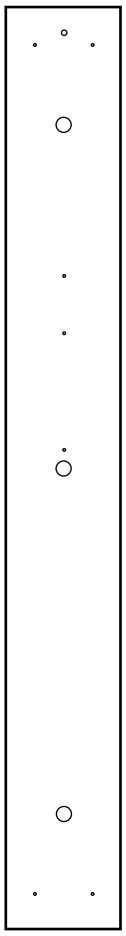



Length Chart

Size	
4′	46″
6′	69″
8′	92″

LED Lumen/Wattage Chart - 4000K

Low	Medium	High
23W	34W	45W
2310 Lu	3180 Lu	4000 Lu

Lumen Multipliers

3000K	.95
3500K	.97
5000K	1.03

LAMAR LED assumes no responsibility for misapplication of fixtures
due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 0826

LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com