# DLLR direct led luminaire



The DLLR is a multi purpose LED utility luminaire that features high quality LED boards from leading component manufacturers. It is a long lasting, low maintenance luminaire suitable for a broad range of applications from coves and garages to restrooms and other areas where a clean looking, highly efficient LED light source is required.

## Features and Specifications:

### Construction:

- Housings are die-formed of code gauge steel for long-term dependable service
- Knockouts are provided for convenient mounting with recessed or surface power feeds
- Frosted linear ribbed polycarbonate diffuser

### Size Options:

- Available in 2', 3', 4' and 8' lengths (nominal)

### Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

### Mounting Options:

- Stem, chain or surface mount on ceiling or wall

### Driver:

- Universal voltage 120-277V standard
- Custom driver tuning for specific lumen requirements
- 0-10V or Lutron dimming optional

### Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example **DLLR48M-35D**

## DLLR

| Series | Size | Power | CCT | General Options |
|---|---|---|---|---|
| **DLLR** = Round lens | **24** = 2' nominal<br>**36**= 3' nominal<br>**48** = 4' nominal<br>**96** = 8' nominal | **L** = Low<br>**M** = Medium<br>**H** = High | **80 CRI**<br>**30** = 3000K<br>**35** = 3500K<br>**40** = 4000K<br>**50** = 5000K<br><br>**90 CRI**<br>**930** = 3000K<br>**935** = 3500K<br>**940** = 4000K<br>**950** = 5000K | **EM** = Emergency pack >90 min., >500 lumens<br>**EMH** = Emergency pack >90 min., >1400 lumens (not available in 2ft models)<br>**EMB** = BABA Compliant Emergency pack >90 min., >500 lumens<br>**D** = 0-10V dimming to 1%<br>**DTD** = 0-10V Dim to Dark<br>**LDH** = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black option<br>**AC** = 4FT Aircraft cable hanging kit w/pre-wired power drop (consult factory for other lengths) |

Consult factory for additional options not shown or listed

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Project Information:

Job Name: _____ Fixture Type: _____

Catalog #: _____ Date: _____

Comments: _____

Certification & Listings:


**LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com**

Specifications subject to change without notice - Rev 0826


# DLLR direct led luminaire

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE


## Dimensions

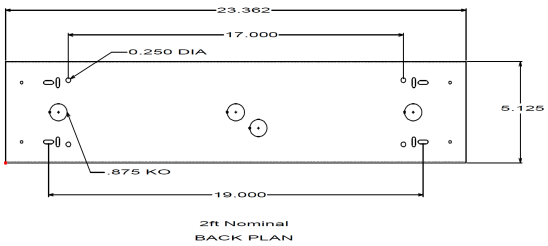



2ft Nominal
BACK PLAN

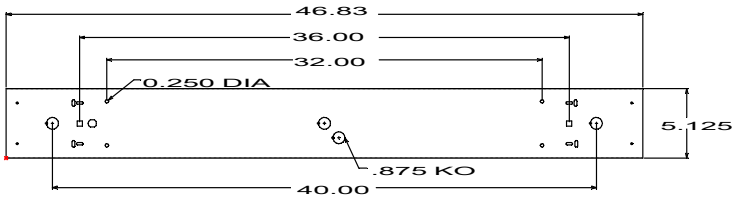


4FT NOMINAL
BACK PLAN

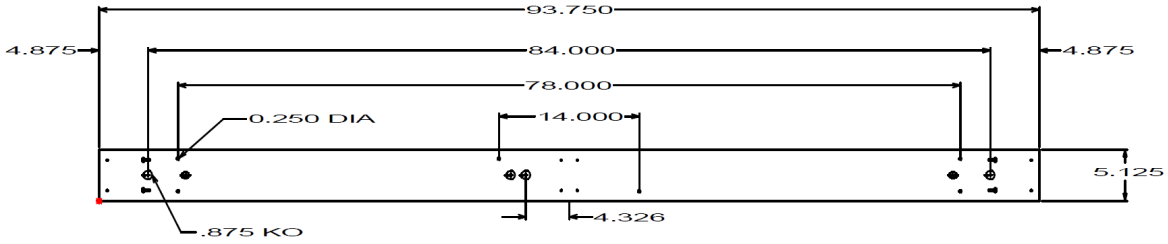


8ft Nominal
BACK PLAN

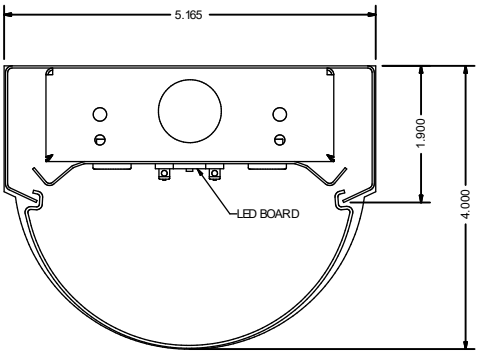


## LED Lumen/Wattage Chart - 4000K

***LED Wattage Chart***

| | Low (L) | Medium (M) | High (H) |
|---|---|---|---|
| 2′ (1 Board) | 10.5W - 1370 lu | 13W - 1618 lu | 26W - 3045 lu |
| 4′ (2 Boards) | 23W - 2716 lu | 31W - 3462 lu | 53W - 5920 lu |
| 8′ (4 Boards) | 42W - 5722 lu | 62W - 6925 lu | 110W - 11840 lu |

LAMAR LED assumes no responsibility for misapplication of fixtures
Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 0826