HWL utility wall | ceiling | suspended mount



The HWL is a decorative all-purpose LED suitable for a variety of applications including residential, commercial and industrial spaces. Combined with front baffle, center divider and 4 position pull chain they are also great for over bed applications.

Features and Specifications:

Construction:

- One piece extruded frosted acrylic diffuser (LED Formula)
- Durable steel body formed from cold rolled steel
- Ends are die-formed for added strength

Size Options:

- Available in 2'and 4' lengths (nominal)

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA

Mounting Options:

- Ceiling, wall or suspended mount

Driver:

- Universal voltage 120-277V standard
- Custom driver tuning available for specific lumen requirements
- 0-10V or Lutron dimming optional

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart, dimensions & accessories

Ordering Guide / Example

HWL48MFA-40D

HWL			FA		
Series	Size	Power	Diffuser	CCT	General Options
HWL = Utility wall, ceiling, suspended mount	**24** = 24" nominal **40** = 40" nominal **48** = 48" nominal **96** = 96" nominal	**L** = Low **M** = Medium **H** = High	**FA** = Frosted Acrylic	**80 CRI** **30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K **90 CRI** **930** = 3000K **935** = 3500K **940** = 4000K **950** = 5000K	**EM** = Emergency pack >90 min., >500 lumens **EMH** = Emergency pack >90 min., >1400 lumens (4ft only) **EMB** = BABA Compliant Emergency pack >90 min., >500 lumens **D** = 0-10V dimming to 1% **DTD** = 0-10V Dim to Dark **LDH** = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black **HF** = High frequency occupancy sensor on/off (internal) **HFAS** = User selectable 10, 20, 30 or 50% adjustable standby **CD** = Center divider (available with 2C wiring) **2C4PC** = 2 circuit 4 position pull chain for over bed **TB** = Top baffle **FB** = Front baffle **TFB** = Top & front baffle **TP** = Tamper-proof screws

Consult factory for additional options not shown or listed
Daylight hold off function will be factory disabled on all bi-level models

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Project Information:

Job Name: _____ Fixture Type: _____

Catalog #: _____ Date: _____

Comments: _____


Certification & Listings:


LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com


HWL utility wall | ceiling | pendant mount


BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE


Dimensions

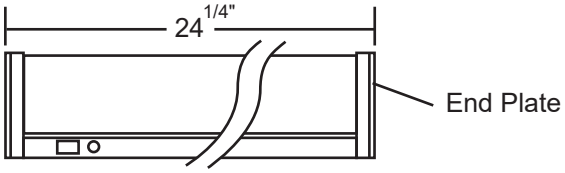


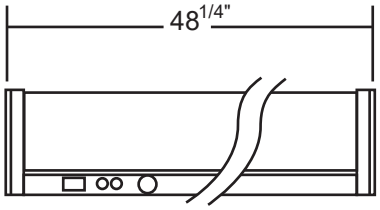




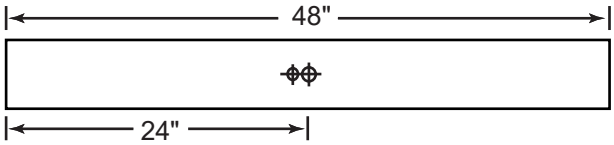





baffle options



Ideal for hospital over bed patient application

When used in draft prone areas, fixtures with high frequency sensors should be rigidly mounted

Accessories

Accessories (order separately)

Cord options available - consult factory

Lumen/Wattage Chart - 4000K

	2′	4′
Low	12W / 1320lu	23W / 2754lu
Med	16W / 1810lu	35W / 3794lu
High	21W / 2275lu	46W / 4768lu

Lumen Multipliers

3000K	.952
3500K	.968
5000K	1.03

LAMAR LED assumes no responsibility for misapplication of fixtures
Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 1026