LAMARLED

The INLL is a general purpose industrial LED ideal for any application requiring reliable and efficient light sources such as garages, assembly lines and other industrial applications.

INLL industrial lensed LED



Features and Specifications:

Construction:

- Durable steel bodies die-formed from cold rolled steel
- Aligner clips are available to keep reflectors aligned in continuous row applications
- Optional aluminum reflector

Size Options:

- Available 4' & 8' sizes (nominal)

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the
- USA Meets Buy America Act (BAA), BABA Compliant

Mounting Options:

- Surface, pendant or chain mount individually or in continuous rows

Driver:

- Universal voltage 120-277V standard
- 0-10V or Lutron dimming optional
- Custom driver tuning available for specific lumen requirements

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example

INLL48M-40

INLL				
Series	Size	Power	CCT	General Options
INLL = Industrial lensed high bay	**48** = 4' nominal **96** = 8' nominal	**L** = Low **M** = Medium **H** = High	**80 CRI** **30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K **90 CRI** **930** = 3000K **935** = 3500K **940** = 4000K **950** = 5000K	**EM** = Emergency pack >90 min., >500 lumens **EMH** = Emergency pack >90 min., >1400 lumens (4ft only) **EMB** = BABA Compliant Emergency pack >90 min., >500 lumens **D** = 0-10V dimming to 1% **DTD** = 0-10V Dim to Dark **LDH** = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black

Accessories (order separately)

VH = V-hanger for chain mounting
AL = Aligner clips

Consult factory for additional options not shown or listed

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Project Information:

Job Name: _____ Fixture Type: _____

Catalog #: _____ Date: _____

Comments: _____

Certification & Listings:


UL CERTIFIED · 120-277V Universal · CRI 80+ · BUILD AMERICA BUY AMERICA BABA COMPLIANT · UNION MADE IN THE USA · RoHS COMPLIANT · 0-10V DIM · 5 YEAR WARRANTY


LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com

INLL industrial lensed LED

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

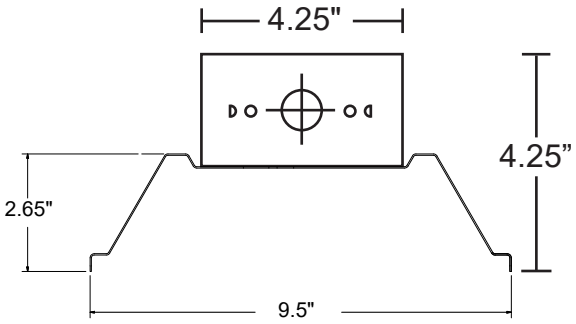

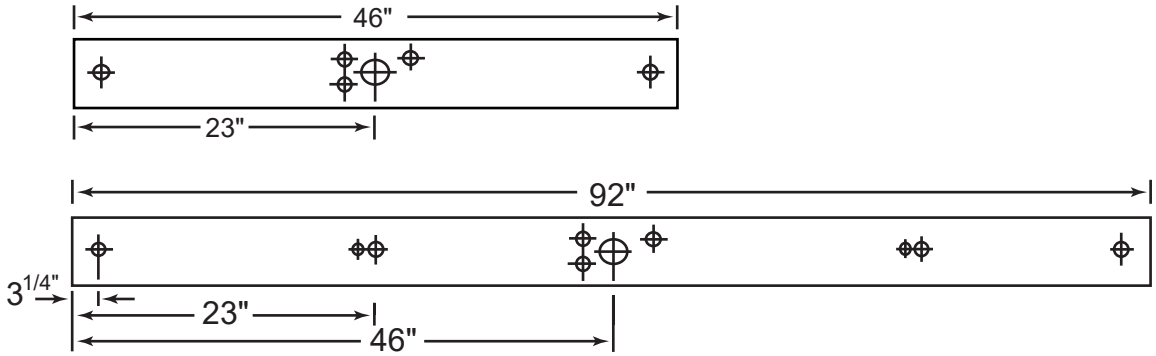

Lumen/Wattage Chart - 4000K

	4’	8’
Low	3540 Lu / 29W	7080 Lu / 58W
Med	5536 Lu / 50W	10,977 Lu / 98W
High	7080 Lu / 61W	14,160 Lu / 122W

LAMAR LED assumes no responsibility for misapplication of fixtures
Due to the rapid advancements in LED technology, please consult our website for the most current technical data.
Specifications subject to change without notice - Rev 0826

LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com