The LVL series is powered by state of the art LED technology and is ideal for applications such as offices, hospitals and schools.

LVL recessed angled lensed luminaire



Features and Specifications:

Construction:
- High reflectance components deliver main beam focus through the high transmission frosted acrylic lens
- Suitable for use in inverted T-Bar grid ceilings
- Integral grid clips

Size Options:
- Available in 2x2 and 2x4 sizes

Listing & Ratings:
- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

Mounting Options:
- Recessed grid mount

Driver:
- Universal voltage 120-277V standard
- 0-10V or Lutron dimming optional
- Custom driver tuning available for specific lumen requirements

Warranty:
- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for dimensions & lumen data chart

Ordering Guide / Example

LVL22M-35D

LVL

Series	Size	Power	CCT	General Options
LVL = Angled Lensed LED	**22** = 2x2 **24** = 2x4	**L** = Low **M** = Medium **H** = High	**80 CRI** **30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K **90 CRI** **930** = 3000K **935** = 3500K **940** = 4000K **950** = 5000K	**EM** = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory) **EMB** = BABA Compliant Emergency pack >90 min., >500 lumens **D** = 0-10V dimming to 1% **DTD** = 0-10V Dim to Dark **LDH** = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black **W** = 6ft Whip (dimming and/or EM leads included when necessary **Accessories** **FK2X2** = Flange kit (2x2) for Dry-wall installation **FK2X4** = Flange kit (2x4) for Dry-wall installation

Consult factory for additional options not shown or listed
Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Project Information:

Job Name: _____ Fixture Type: _____

Catalog #: _____ Date: _____

Comments: _____

Certification & Listings:


LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com

LVL recessed lensed luminaire


BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions


2x2

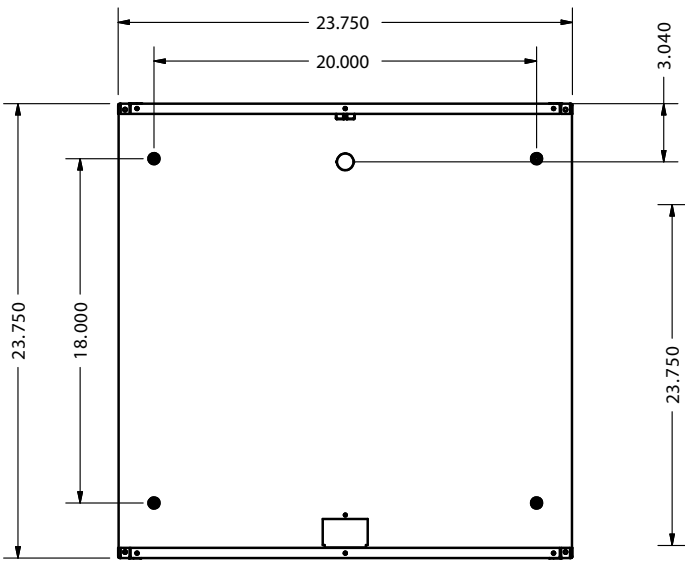

2x4

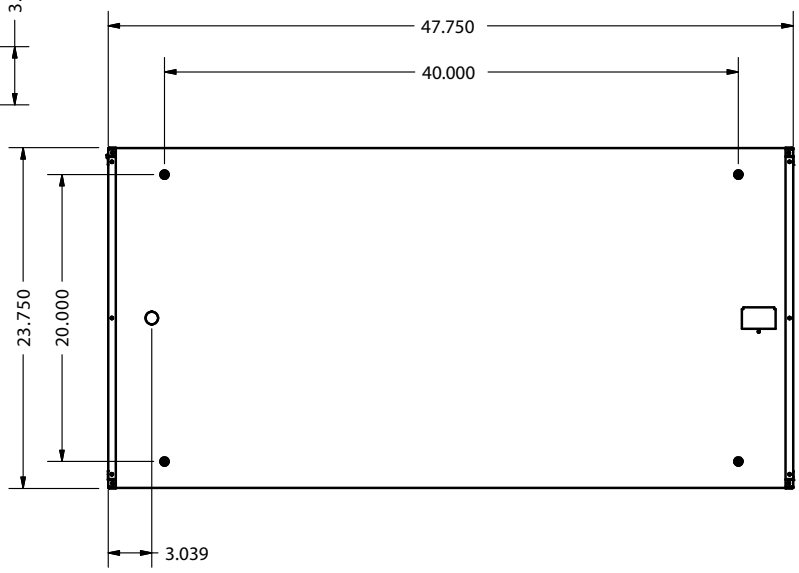

End View

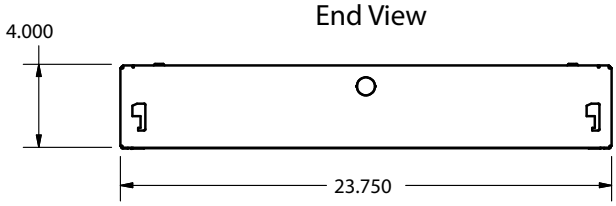

Lumen/Wattage Chart - 4000K

	Low	Medium	High
2x2	2179 Lu/19W	3037 Lu/26W	3814 Lu/32W
2x4	4065 Lu/34W	5441 Lu/45W	6754 Lu/57W

Lumen Multipliers	
3000K	0.952
3500K	0.968
5000K	1.03

LAMAR LED assumes no responsibility for misapplication of fixtures
Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 1026