LAMARLED

The MCRL series is ideal for residential, commercial or institutional applications such as stairwells, dormitories or other applications with low ceiling heights.

MCRL mini corner mount LED



For illustration use only

Features and Specifications:

Construction:

- Die formed code gauge cold rolled steel bodies for strength and uniformity
- Lens is a frosted LED formulation acrylic (std)
- Door is hinged °ush white steel (optional tamperproof screws)

Size Options:

- Available in 2' and 4' lengths (nominal)

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the
- USA Meets Buy America Act (BAA), BABA Compliant

Mounting Options:

- Wall/Corner mount

Driver:

- Universal voltage 120-277V standard
- 0-10V or Lutron dimming optional
- Custom driver tuning available for specific lumen requirements

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example **MCRL48M-40**

MCRL				
Series	Size	Power	CCT	General Options
MCRL = Corner mount LED	**24** = 2' (nominal) **48** = 4' (nominal)	**L** = Low **M** = Medium **H** = High	**80 CRI** **30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K **90 CRI** **930** = 3000K **935** = 3500K **940** = 4000K **950** = 5000K	**EM** = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory) **EMH** = Emergency pack >90 min., >1400 lumens (4ft only) **EMB** = BABA Compliant Emergency pack >90 min., >500 lumens **D** = 0-10V dimming to 1% **DTD** = 0-10V Dim to Dark **LDH** = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black **TP** = Tamperproof screws **AWNR** = Lutron Athena wireless node integral fixture control (RF only) **AWNS** = Lutron Athena wireless node integral fixture control (RF with daylight and occupancy sensing)

Consult factory for additional options not shown or listed

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Project Information:

Job Name: Fixture Type:

Catalog #: Date:

Comments:


Certification & Listings:


LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com

MCRL mini corner mount LED

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

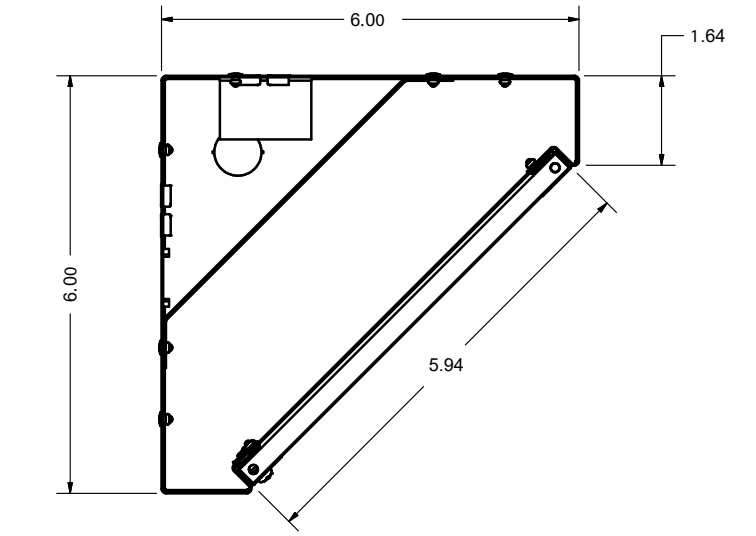

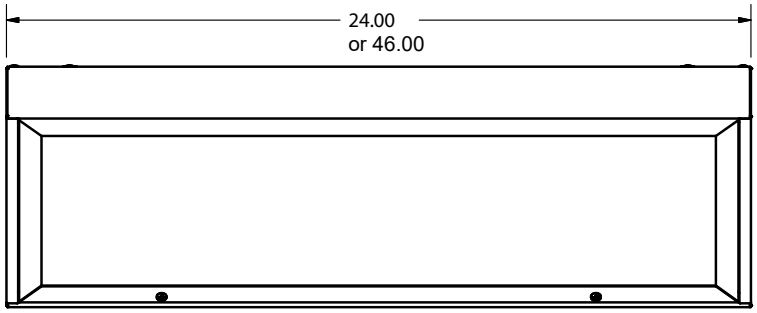

Lumen/Wattage Chart - 4' 4000K

	4' 4000K
Low	2365 Lu / 24W
Med	3260 Lu / 35.4W
High	4095 Lu / 47.3W

Lumen Multipliers

3000K	**.952**
3500K	**.968**
5000K	**1.03**

LAMAR LED assumes no responsibility for misapplication of fixtures
Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 0826