
LAMARLED

At only 2.25" wide, the NLRSF/NLRF fits discretely into many architectural applications. It is suitable for installations in plaster or dry wall type ceilings in single or continuous runs.

NLRSF/NLRF

narrow linear | spackle flanged/flanged

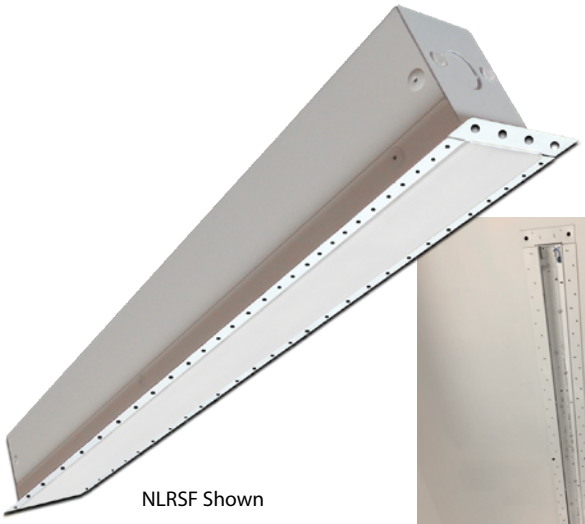

NLRSF Shown

Shown in unfinished ceiling without lens

For supporting NLRF (flanged) and NLRSF (spackle flanged) units we recommend wood framing or threaded rod secured to structure above (by others)

Features and Specifications:

Construction:

- Custom extruded diffuser offers high light transmission of over 85% with excellent LED diffusion
- Precision fabricated steel housings are an economic alternative to extruded aluminum

Size Options:

- Available in 2', 4', 6' and 8' lengths (nominal)

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

Mounting Options:

- Recessed plaster or dry wall
  Note: NLRF models must be framed out by others and secured to frame above or alongside

Driver:

- Universal voltage 120-277V standard
- Custom driver tuning available for specific lumen requirements
- 0-10V or Lutron dimming optional

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example

NLR48MFA-35D

Series	Size	Power	Lens Options	CCT	General Options	Run Configuration
NLRSF = Spackle flanged **NLRF** = Flanged	**24** = 2' nominal **36** = 3' nominal **48** = 4' nominal **72** = 6' nominal **96** = 8' nominal	**L** = Low **M** = Medium **H** = High	**FA** = Flat acrylic	**80 CRI** **30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K **90 CRI** **930** = 3000K **935** = 3500K **940** = 4000K **950** = 5000K	**D** = 0-10V dimming to 1% **DTD** = 0-10V Dim to Dark **LDH** = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black	**Blank** = Individual **BOR** = Beginning of run **EOR** = End of run **INT** = Intermediate

Consult factory for additional options not shown or listed & for continuous run ordering code

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Project Information:

Job Name: _____ Fixture Type: _____

Catalog #: _____ Date: _____

Comments: _____

Certification & Listings:

LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com

NLRSF/NLRF


narrow linear | spackle flanged/flanged


BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

NOTE: Continuous row housing length same as individual


Dimensions

Narrow Linear Recessed – 'Mud-In' dry-wall (NLRSF), Flanged dry-wall (NLRF)

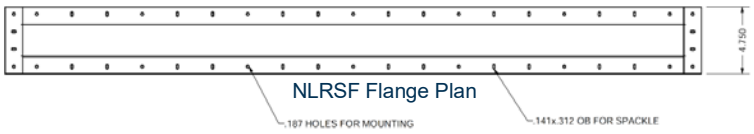

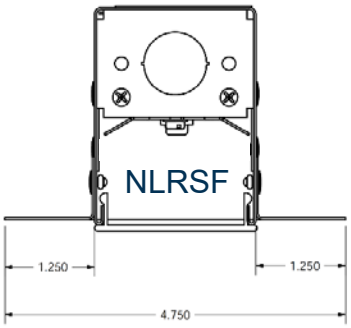

Mud-In Dry-Wall Application

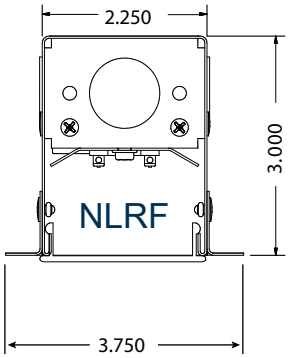

Flanged Application

Nominal Length	Housing Length	NLRSF	NLRF
	Inches (ref)		
2'	23.00	25.63	24.50
4'	46.00	48.63	47.50
6'	69.00	71.63	70.50
8'	92.00	94.63	93.50
Width	2.25	4.75	3.75

***See Note Below**

Rough-In Dimensions - Add 1/2" to housing size

NLRF

Size	INT	BOR-EOR
2′	23″	23.75″
4′	46″	46.75″
6′	69″	69.75″
8′	92″	92.75″

LED Lumen/Wattage Chart - 4000K

Low	Medium	High
24W	33W	40W
2455 Lu	3210 Lu	3852 Lu

Lumen Multipliers

3000K	.95
3500K	.97
5000K	1.03

LAMAR LED assumes no responsibility for misapplication of fixtures
Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 1026