
LAMARLED

At only 2.25" wide, the NLSI fits discretely into many architectural applications. It is suitable for continuous runs and offers a clean, unbroken look.

NLSI narrow linear indirect suspended

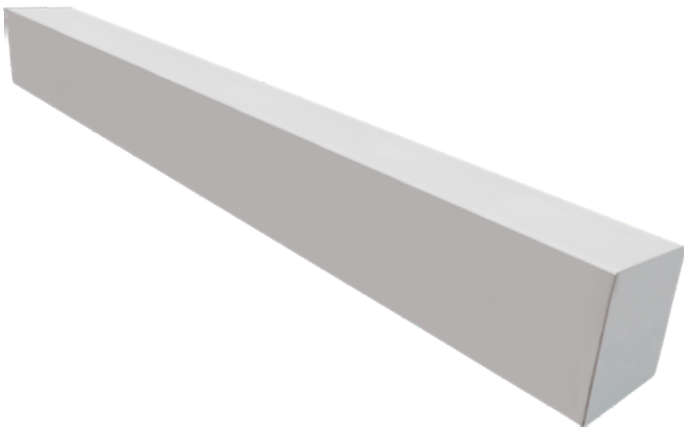

Features and Specifications:

Construction:
- Custom extruded diffuser offers high light transmission with excellent LED diffusion
- Precision fabricated steel housings are an economic alternative to extruded aluminum

Size Options:
- Available in 2', 3, 4', 6' and 8' lengths (nominal)

Listing & Ratings:
- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

Mounting Options:
- Cable mount

Driver:
- Universal voltage 120-277V standard
- Custom driver tuning available for specific lumen requirements
- 0-10V or Lutron dimming

Warranty:
- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example

NLSI48M-40D

NLSI					
Series	Size	Power	CCT	General Options	Run Configuration
NLSI = Indirect suspended	**24** = 2' nominal **36** = 3' nominal **48** = 4' nominal **72** = 6' nominal **96** = 8' nominal	**L** = Low **M** = Medium **H** = High	**80 CRI** **30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K **90 CRI** **930** = 3000K **935** = 3500K **940** = 4000K **950** = 5000K	**EM** = Emergency pack >90 min., >500 lumens **EMH** = Emergency pack >90 min., >1400 lumens (4-8ft only) **EMB** = BABA Compliant Emergency pack >90 min., >500 lumens **BLK** = Black metal construction (w/Black AC cable set) **D** = 0-10V dimming to 1% (standard) **DTD** = 0-10V Dim to Dark **LDH** = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black	**Blank** = Individual **BOR** = Beginning of run (6' & 8' only) **EOR** = End of run (2'-8') **INT** = Intermediate (6' & 8' only)

Consult factory for additional options not shown or listed
Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A
4ft AC cable kits and pre-wired power drop included, other lengths available - consult factory
Feed through wiring is included for continuous run models (BOR, INT and EOR)

Project Information:

Job Name: _____ Fixture Type: _____

Catalog #: _____ Date: _____

Comments: _____

Certification & Listings:

UL CERTIFIED · 120-277V Universal · CRI 80+ · BUILD AMERICA BUY AMERICA BABA COMPLIANT · UNION MADE IN THE USA · RoHS COMPLIANT · 0-10V DIM · 5 YEAR WARRANTY


LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com

Specifications subject to change without notice - Rev 0826

NLSI narrow linear indirect suspended

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

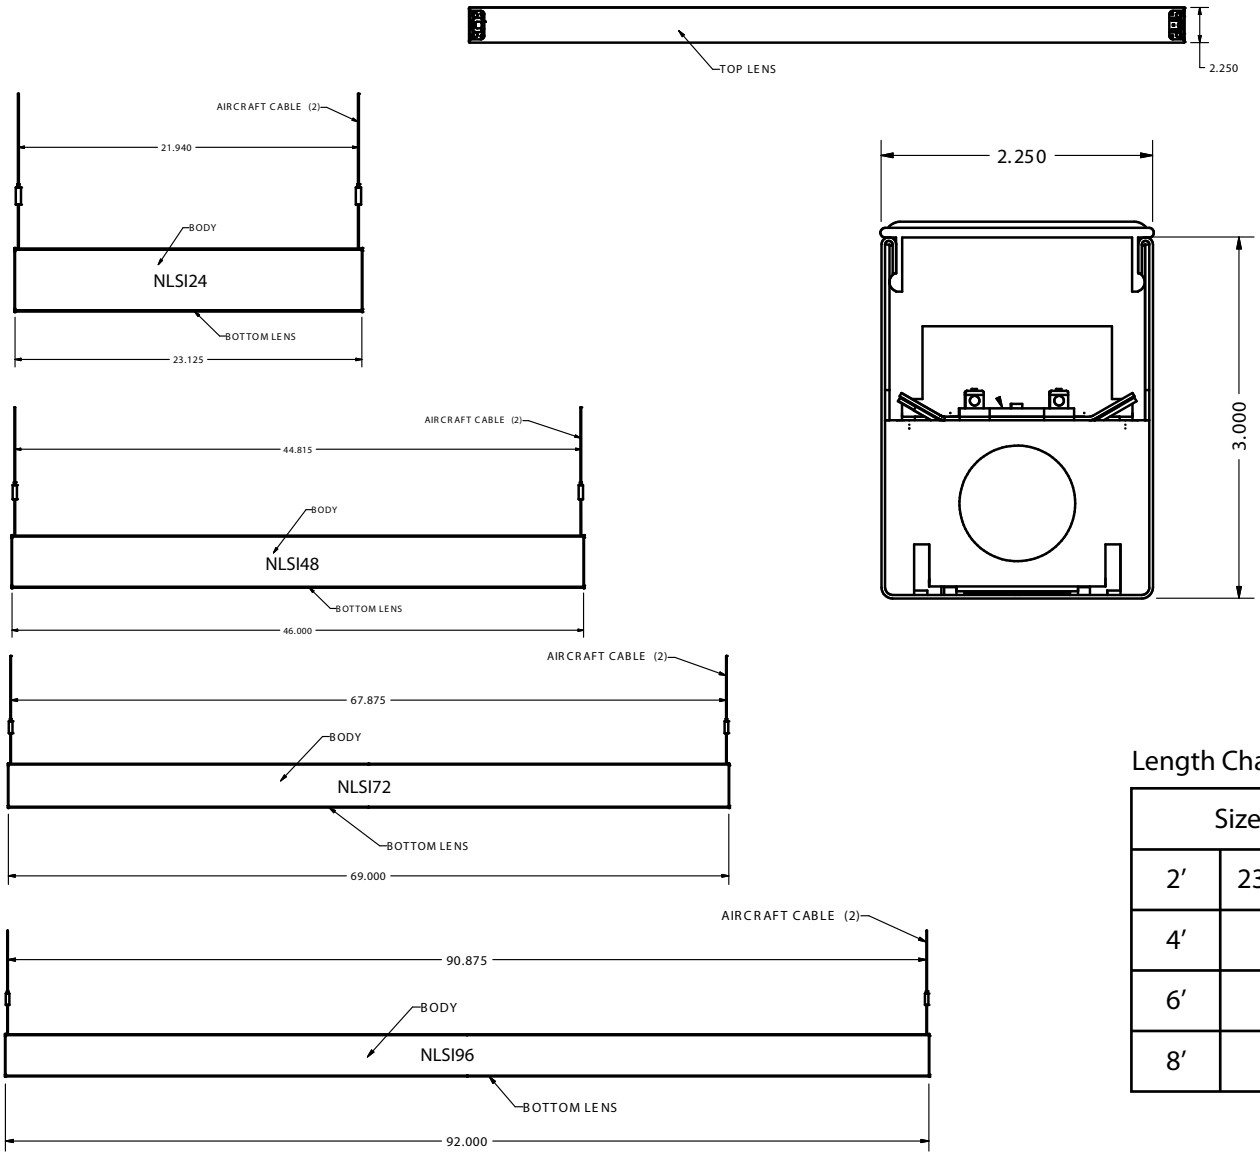

Length Chart

Size	
2′	23.125″
4′	46″
6′	69″
8′	92″

LED Lumen/Wattage Chart - 4000K

NLSI 4’

Low	Medium	High
24W	33W	52W
2455 Lu	3210 Lu	4614 Lu

Lumen Multipliers

3000K	.95
3500K	.97
5000K	1.03

LAMAR LED assumes no responsibility for misapplication of fixtures
Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 0826