
LAMARLED

At only 2.25″ wide, the NLWD fits discretely into many architectural applications. It is suitable for continuous runs and offers a clean, unbroken look.

NLWD narrow linear wall

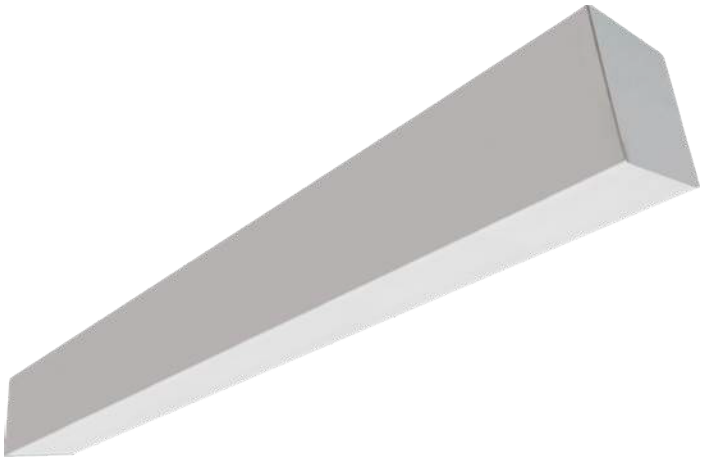

Features and Specifications:

Construction:
- Custom extruded diffuser offers high light transmission with excellent LED diffusion, optional Crossblade Louver
- Precision fabricated steel housings are an economic alternative to extruded aluminum

Size Options:
- Available in 2′, 3, 4′, 6′ and 8′ lengths (nominal)

Listing & Ratings:
- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

Mounting Options:
- Wall mount

Driver:
- Universal voltage 120-277V standard
- Custom driver tuning available for specific lumen requirements
- 0-10V or Lutron dimming

Warranty:
- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example **NLWD48MB-40D**

NLWD

Series	Size	Power	Lens Options	CCT	General Options	Run Configuration
NLWD = Direct wall	**24** = 2′ nominal **36** = 3′ nominal **48** = 4′ nominal **72** = 6′ nominal **96** = 8′ nominal	**L** = Low **M** = Medium **H** = High	**B** = Bottom lens **CBL** = Crossblade louver	**80 CRI** **30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K **90 CRI** **930** = 3000K **935** = 3500K **940** = 4000K **950** = 5000K	**EM** = Emergency pack >90 min., >500 lumens **EMH** = Emergency pack >90 min., >1400 lumens (4-8ft only) **EMB** = BABA Compliant Emergency pack >90 min., >500 lumens **BLK** = Black metal construction **D** = 0-10V dimming to 1% (standard) **DTD** = 0-10V Dim to Dark **LDH** = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black	**Blank** = Individual **BOR** = Beginning of run (6′ & 8′ only) **EOR** = End of run (2′-8′) **INT** = Intermediate (6′ & 8′ only)

Consult factory for additional options not shown or listed
Feed through wiring is included for continuous run models (BOR, INT and EOR)

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Project Information:

Job Name: Fixture Type:

Catalog #: Date:

Comments:

Certification & Listings:


UL CERTIFIED · 120-277V Universal · CRI 80+ · BUILD AMERICA BUY AMERICA BABA COMPLIANT · UNION MADE IN THE USA · RoHS COMPLIANT · 0-10V DIM · 5 YEAR WARRANTY

LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com


NLWD narrow linear wall

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

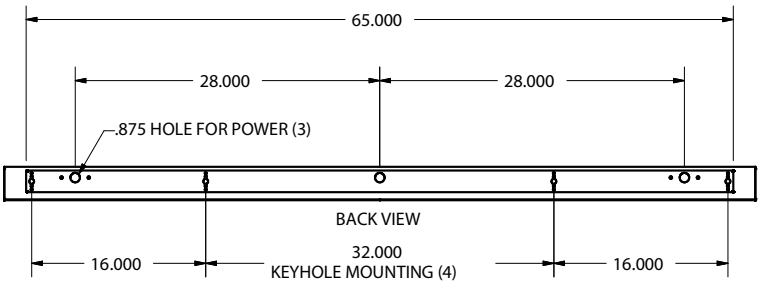

NLWD72

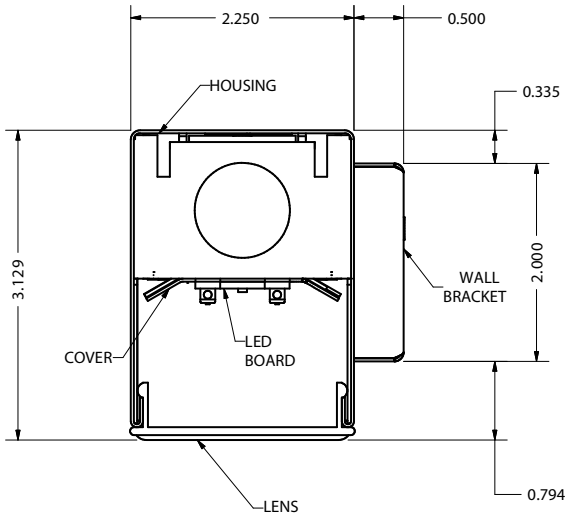

NLWD Length Chart

Size	
2′	23.125″
4′	46″
6′	69″
8′	92″

LED Lumen/Wattage Chart - 4000K

NLWD 4’

Low	Medium	High
24W	33W	52W
2455 Lu	3210 Lu	4614 Lu

Lumen Multipliers

3000K	.95
3500K	.97
5000K	1.03

LAMAR LED assumes no responsibility for misapplication of fixtures
Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 0826