LAMARLED

The QML series is a clean-lined, stylish LED luminaire ideal for schools, offices and other spaces. The QML offers maximum uplight with subtle downlight through a perforated metal diffuser.

QML Quazar LED direct/indirect



Features and Specifications:

Construction:
- Durable steel body manufactured from code gauge steel
- Direct/Indirect wide beam perforated diffuser for uniform ceiling illumination and a glowing, low brightness luminance

Size Options:
- Available in 4' and 8' lengths (nominal)

Listing & Ratings:
- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

Mounting Options:
- Cable mount individually or in continuous rows **(must specify)**
- Cable mount options to suit your application - 4ft "Y" cable kits and pre-wired power drop are included
- Feed through wiring is included for continuous runs

Driver:
- Universal voltage 120-277V standard
- 0-10V or Lutron dimming
- Custom driver tuning available for specific lumen requirements

Warranty:
- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example **QML48MPF-40D**

QRL			PF			
Series	Size	Power	Bottom Trim	CCT	General Options	Run Configuration
QML = Quazar	**48** = 4ft (nominal) **96** = 8ft (nominal)	**L** = Low **M** = Medium **H** = High	**PF** = Perforated metal - white (std)	**80 CRI** **30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K **90 CRI** **930** = 3000K **935** = 3500K **940** = 4000K **950** = 5000K	**EM** = Emergency pack >90 min., >500 lumens **EMB** = BABA Compliant Emergency pack >90 min., >500 lumens **D** = 0-10V dimming to 1% (standard) **DTD** = 0-10V Dim to Dark **LDH** = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black	**BLANK** = Individual **BOR** = Beginning of run (8ft only) **INT** = Intermediate (8ft only) **EOR** = End of run (4ft & 8ft only)

Individual units are not suitable for continuous row mounting and **cannot** be field modified

For joining units together in continuous rows please specify BOR, INT and EOR models
4ft AC kits and pre-wired power drop included (standard) - consult factory for other lengths

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A Consult factory for additional options not shown or listed

Project Information:

Job Name: _____ Fixture Type: _____

Catalog #: _____ Date: _____

Comments: _____

Certification & Listings:


UL CERTIFIED · 120-277V Universal · CRI 80+ · 0-10V DIM · UNION MADE IN THE USA · RoHS COMPLIANT · 5 YEAR WARRANTY · BUILD AMERICA BUY AMERICA BABA COMPLIANT


LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com

QML Quazar LED direct/indirect

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

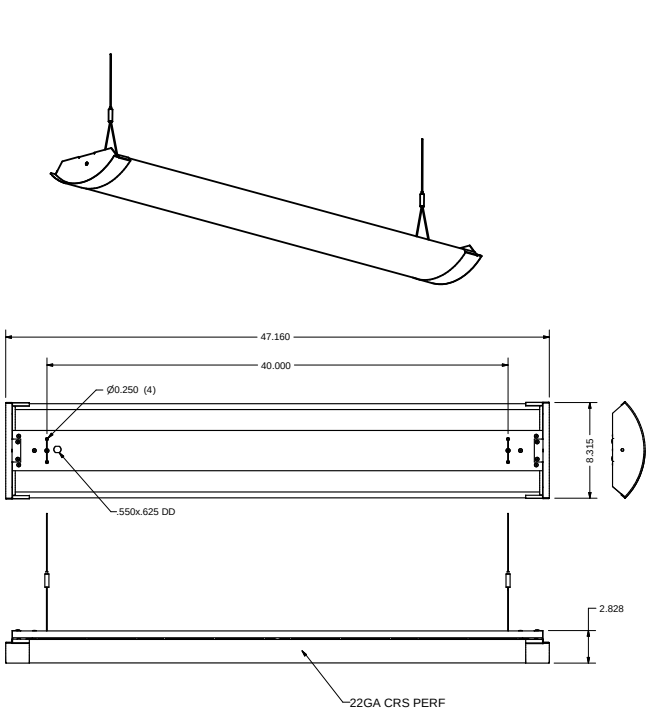

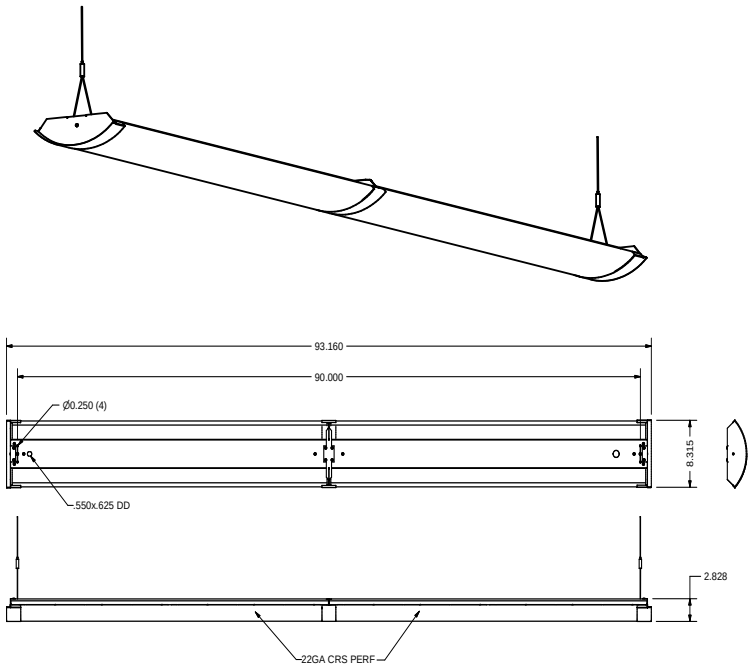

Lumen/Wattage Chart - 4000K

4000K

	4′	8′
Low	4095 Lu / 40W	8190 Lu / 79W
Med	5900 Lu / 62W	11,800 Lu / 124W
High	8760 Lu / 94W	17,515 Lu / 188W

Lumen Multipliers

3000K	**.952**
3500K	**.968**
5000K	**1.03**

LAMAR LED assumes no responsibility for misapplication of fixtures
Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 1026