LAMARLED

The SFL offers the look of contemporary fluorescent lighting with the efficiency and low maintenance of LED technology. This series is ideal for use in offices, hospitals and schools

SFL surface formed lens



Features and Specifications:

Construction:
- Linear arrayed LED modules provide even illumination and are field replaceable
- Formed lens is retained in hinged door frame
- Made from code gauge steel

Size Options:
- Available in 2x2 or 2x4 sizes

Listing & Ratings:
- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

Mounting Options:
- Surface or suspended mount

Driver:
- Universal voltage 120-277V standard
- Custom driver tuning available for specific lumen requirements
- 0-10V or Lutron dimming optional

Warranty:
- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example **SFL22M-35**

SFL

Series	Lumens	Power	CCT	General Options
SFL = Surface formed lens	**22** =2x2 **24** = 2x4	**L** = Low **M** = Medium **H** = High	**80 CRI** **30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K **90 CRI** **930** = 3000K **935** = 3500K **940** = 4000K **950** = 5000K **MCT** = Field Selectable CCT 3000K, 3500K or 4000K (80 CRI)	**EM** = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory) **EMB** = BABA Compliant Emergency pack >90 min., >500 lumens **D** = 0-10V dimming to 1% **DTD** = 0-10V Dim to Dark **LDH** = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black

Consult factory for additional options not shown or listed

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Project Information:

Job Name: _____ Fixture Type: _____

Catalog #: _____ Date: _____

Comments: _____

Certification & Listings:

UL CERTIFIED · 120-277V Universal · CRI 80+ · BUILD AMERICA BUY AMERICA BABA COMPLIANT · UNION MADE IN THE USA · RoHS COMPLIANT · 0-10V DIM · 5 YEAR WARRANTY

LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com


Specifications subject to change without notice - Rev 0826

SFL surface formed lens


BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions


2x2

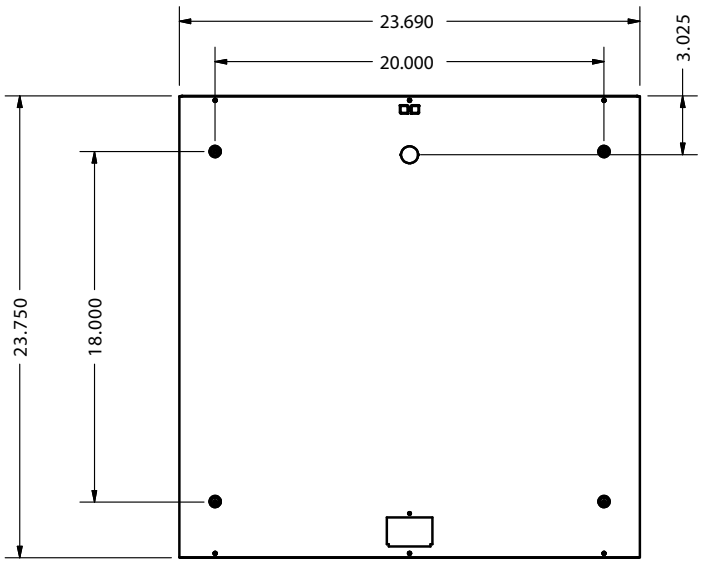

2x4

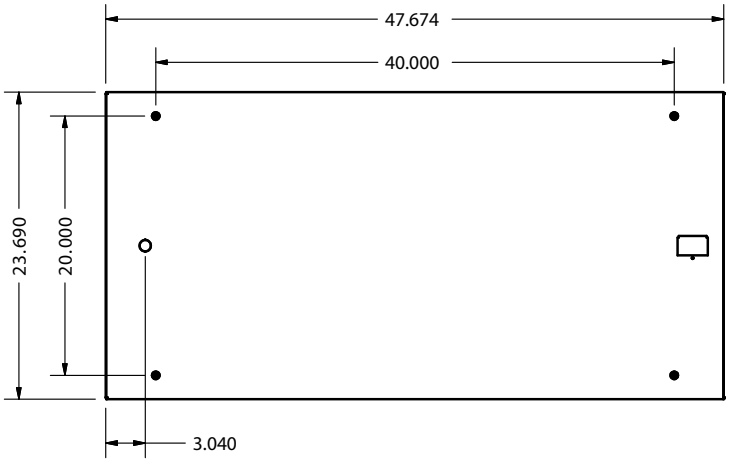

End View

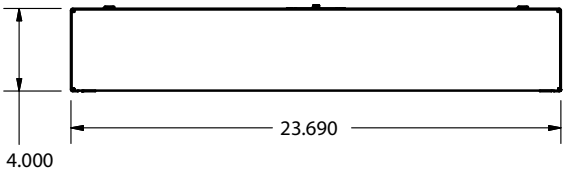

Lumen/Wattage Chart - 4000K

	Low	Medium	High
2x2	2340 Lu/21W	3230 Lu/30W	3986 Lu/38W
2x4	4680 Lu/42W	6459 Lu/59W	7972 Lu/75W

LAMAR LED assumes no responsibility for misapplication of fixtures
Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 0826