LAMARLED

The TCCL is a heavy-duty, compact corner strip that is ideal for coves, showcases and other areas where low profile linear light sources are required

TCCL tiny channel | corner LED



Features and Specifications:

Construction:

- Durable steel body
- Snap-on frosted lens, injection molded end caps
- Wireway covers attach simply with screws for easy maintenance

Size Options:

- Available in 2', 3', 4', 6' and 8' lengths (nominal)

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA Meets
- Buy America Act (BAA), BABA Compliant

Mounting Options:

Surface mount

Driver:

- Universal voltage 120-277V standard
- Custom driver tuning for specific lumen requirements
- 0-10V or Lutron dimming optional

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example

TCCL48M-40D

TCCL

Series	Size	Power	CCT	General Options
TCCL = Tiny channel corner led	**24** = 2' nominal **36** = 3' nominal* **48** = 4' nominal **72** = 6' nominal **96** = 8' nominal	**L** = Low **M** = Medium **H** = High	**80 CRI** **30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K **90 CRI** **930** = 3000K **935** = 3500K **940** = 4000K **950** = 5000K **MCT** = Field Selectable CCT 3000K, 3500K or 4000K (80 CRI)	**EM** = Emergency pack >90 min., >500 lumens (2ft not available) **EMB** = BABA Compliant Emergency pack >90 min., >500 lumens **D** = 0-10V dimming to 1% **DTD** = 0-10V Dim to Dark **LDH** = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black

Consult factory for additional options not shown or listed Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Project Information:

Job Name: _____ Fixture Type: _____

Catalog #: _____ Date: _____

Comments: _____

Certification & Listings:


UL CERTIFIED · 120-277V Universal · CRI 80+ · BUILD AMERICA BUY AMERICA BABA COMPLIANT · UNION MADE IN THE USA · RoHS COMPLIANT · 0-10V DIM · 5 YEAR WARRANTY

LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com

TCCL tiny channel | corner LED

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

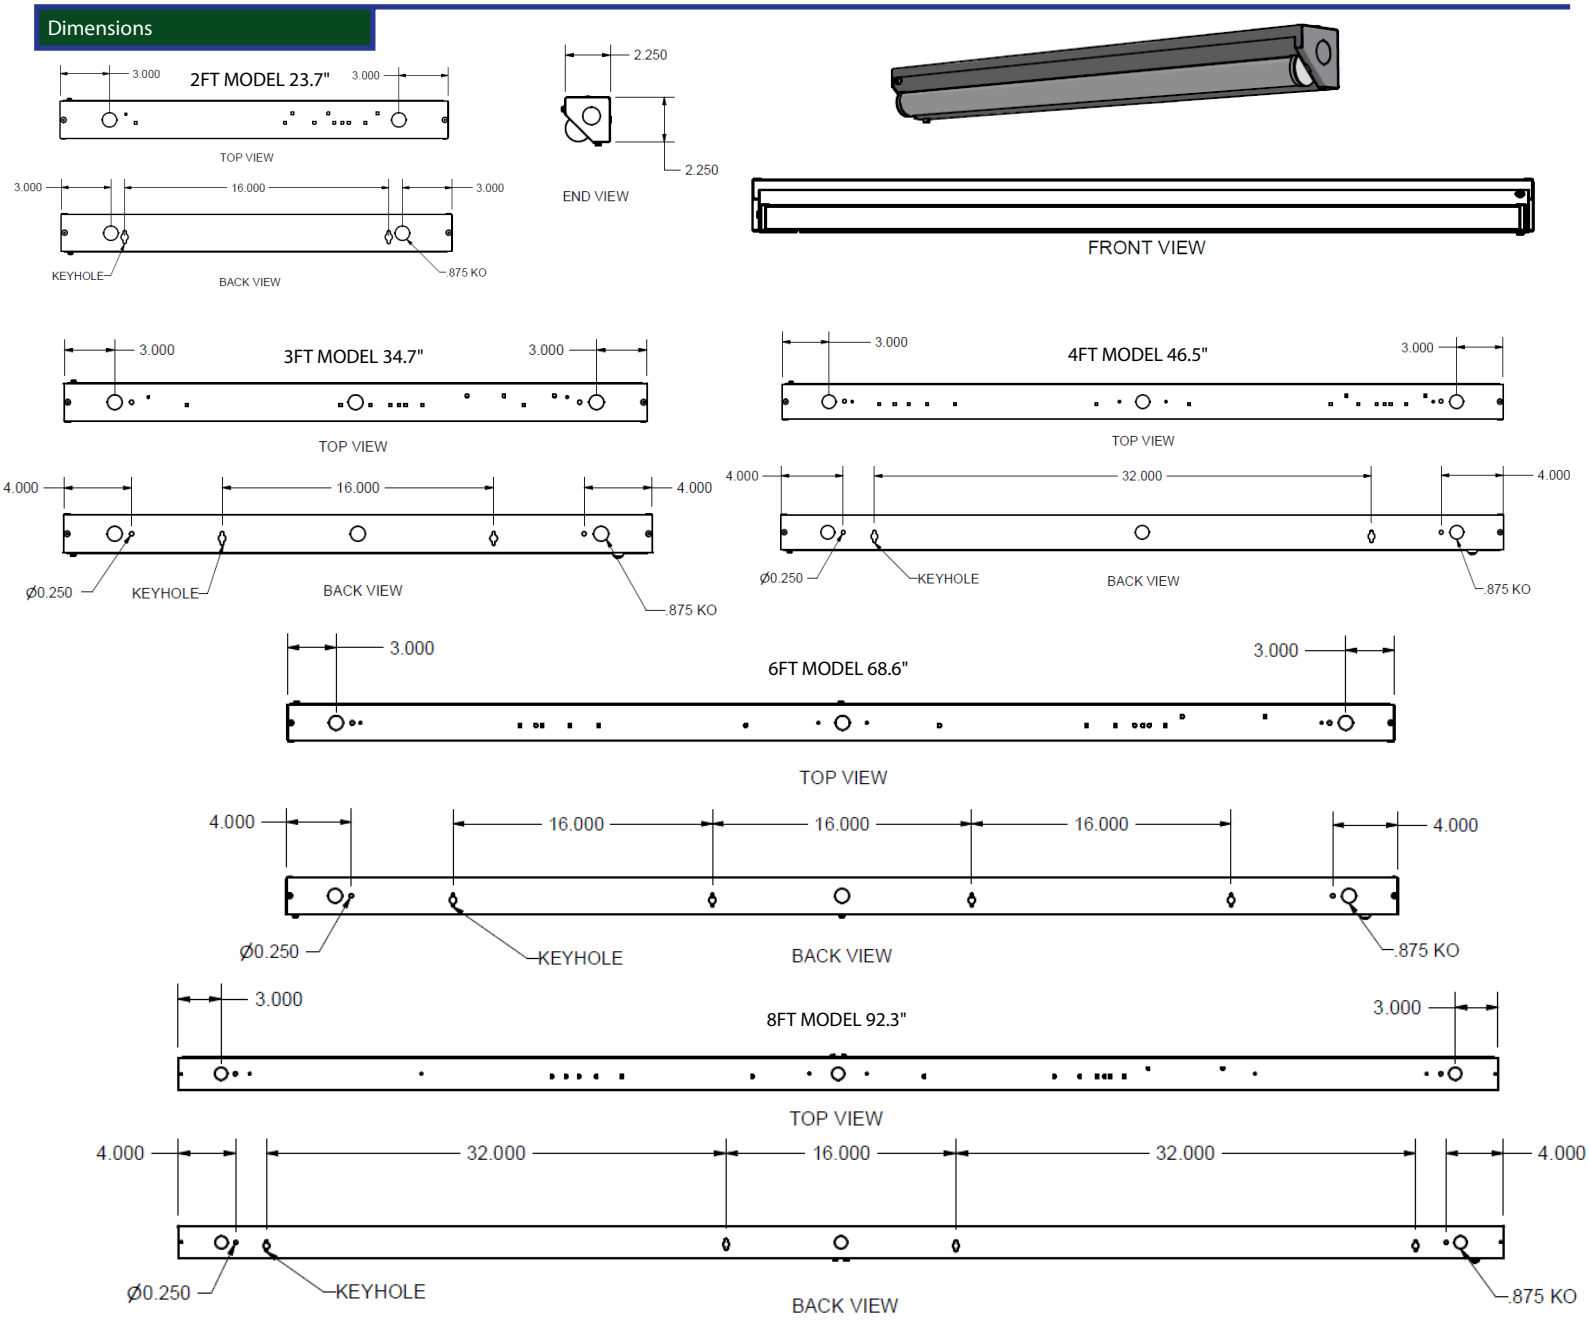

Lumen/Wattage Chart - 4000K

4000K	Low	Med	High
4’	2309 19W	4041 33W	5867 51W
8’	4618 38W	8082 66W	11,734 102W

CCT	Lumen Multiplier
3000K	95.0%
3500K	96.0%
4000K	100.0%
5000K	101.0%

LAMAR LED assumes no responsibility for misapplication of fixtures
Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 0826