The TCMLL is a heavy-duty, compact strip that is ideal for coves, showcases and other areas where very low profile linear light sources are required

TCMLL tiny lensed | multi-channel



Features and Specifications:

Construction:

- Durable steel body
- Snap-on frosted lens, injection molded end caps
- Wireway covers attach simply with screws for easy maintenance

Size Options:

- Available in 2′, 3′, 4′, 6′ and 8′ lengths (nominal)

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA Meets
- Buy America Act (BAA), BABA Compliant

Mounting Options:

- Surface or suspended mount

Driver:

- Universal voltage 120-277V standard
- Custom driver tuning for specific lumen requirements
- 0-10V or Lutron dimming optional

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example

TCMLL48M-40

TCMLL				
Series	Size	Power	CCT	General Options
TCMLL = Tiny lensed multi-channel	**24** = 2′ nominal **36** = 3′ nominal **48** = 4′ nominal **72** = 6′ nominal **96** = 8′ nominal	**L** = Low **M** = Medium **H** = High	**80 CRI** **30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K **90 CRI** **930** = 3000K **935** = 3500K **940** = 4000K **950** = 5000K **MCT** = Field Selectable CCT 3000K, 3500K or 4000K (80 CRI)	**EM** = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory) **EMB** = BABA Compliant Emergency pack >90 min., >500 lumens **D** = 0-10V dimming to 1% **DTD** = 0-10V Dim to Dark **LDH** = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black

Consult factory for additional options not shown or listed Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Project Information:

Job Name: _____ Fixture Type: _____

Catalog #: _____ Date: _____

Comments: _____


Certification & Listings:


LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com

TCMLL tiny lensed | multi-channel

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

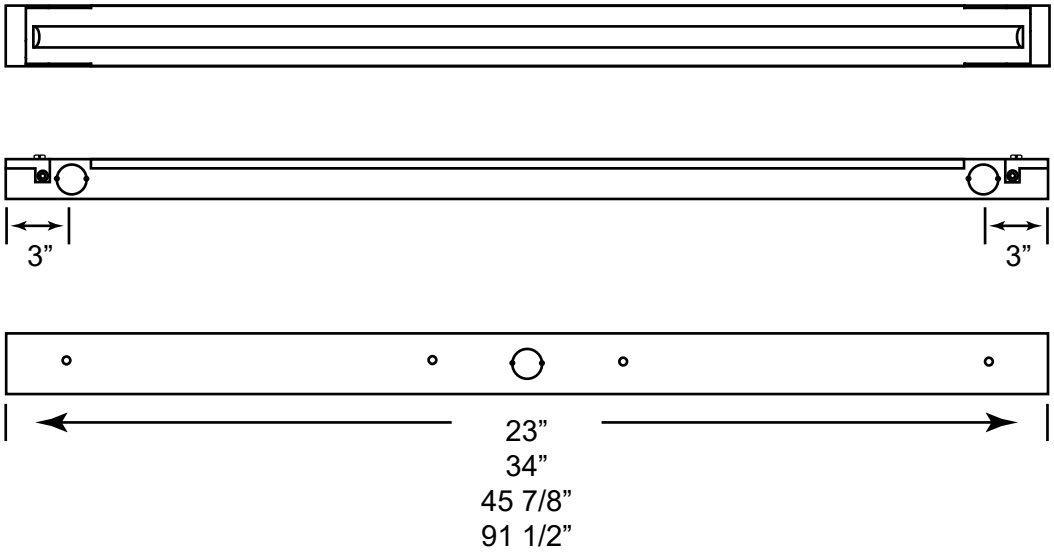

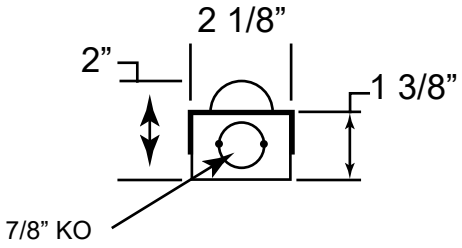

Lumen/Wattage Chart - 4000K

4000K	Low	Med	High
4’	2375 20W	3940 35W	5675 54W
8’	4750 40W	7880 70W	10,950 108W

CCT	Lumen Multiplier
3000K	95.0%
3500K	96.0%
4000K	100.0%
5000K	101.0%

LAMAR LED assumes no responsibility for misapplication of fixtures
Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 1026