The TRSD fits perfectly into many architectural applications. It is suitable for continuous runs and offers a clean, unbroken look.

TRSD Triton | triangular linear direct surface/suspended



Features and Specifications:

Construction:
- Custom extruded diffuser offers high light transmission with excellent LED diffusion
- Precision fabricated steel housings are an economic alternative to extruded aluminum

Size Options:
- Available in 2', 3, 4', 6' and 8' lengths (nominal)

Listing & Ratings:
- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

Mounting Options:
- Surface or cable mount (specify "AC" when ordering)

Driver:
- Universal voltage 120-277V standard
- Custom driver tuning available for specific lumen requirements
- 0-10V or Lutron dimming

Warranty:
- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example **TRSD48M-40D**

TRSD					
Series	Size	Power	CCT	General Options	Run Configuration
TRSD = Direct surface/suspended	**24** = 2' nominal **36** = 3' nominal* **48** = 4' nominal **72** = 6' nominal **96** = 8' nominal	**L** = Low **M** = Medium **H** = High	**30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K	**EM** = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory - 3'-8' only) **EMB** = BABA Compliant Emergency pack >90 min., >500 lumens **BLK** = Black metal construction **D** = 0-10V dimming to 1% (standard) **DTD** = 0-10V Dim to Dark **LDH** = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black **AC** = 4ft aircraft cable mount	**Blank** = Individual **BOR** = Beginning of run (6' & 8' only) **EOR** = End of run (2'-8') **INT** = Intermediate (6' & 8' only)

Consult factory for additional options not shown or listed
4ft AC cable kits and pre-wired power drop included with -AC option, other lengths available - consult factory
Feed through wiring is included for continuous run models (BOR, INT and EOR)

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A
*Custom order on request - Minimum order quantities apply

Project Information:

Job Name: _____ Fixture Type: _____

Catalog #: _____ Date: _____

Comments: _____


Certification & Listings:


LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com


TRSD Triton | triangular linear direct surface/suspended


BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE


Dimensions

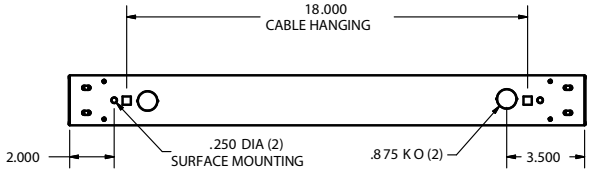

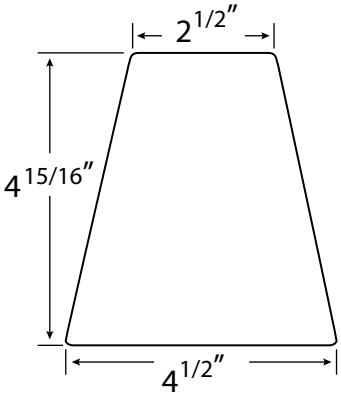

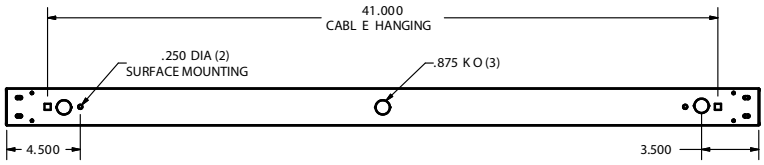


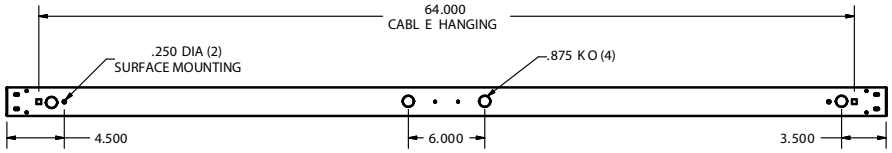

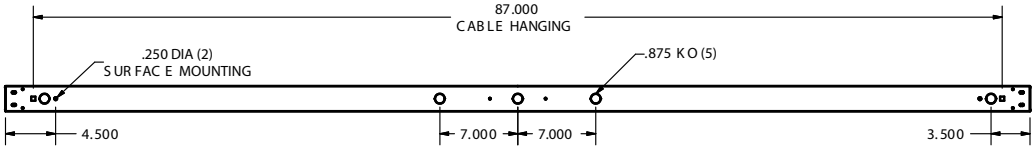


Length Chart

Size	
2′	23.125″
4′	46″
6′	69″
8′	92″

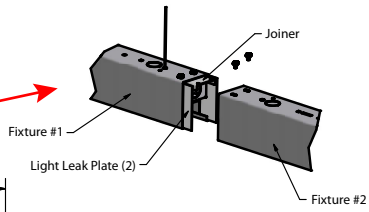

Typical Run Configuration (12′ example shown)

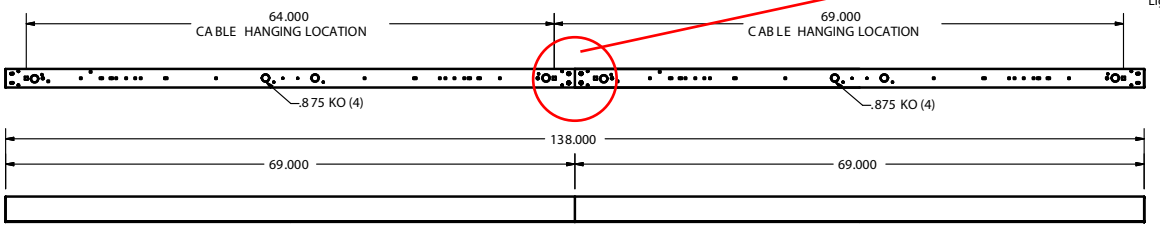

LED Lumen/Wattage Chart - 4000K

TRSD 4’

Low	Medium	High
24W	32W	49W
2775 Lu	3641 Lu	5286 Lu

Lumen Multipliers

3000K	.95
3500K	.96
5000K	1.01

LAMAR LED assumes no responsibility for misapplication of fixtures
Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 1026