




The 3x4 series is a premium LED luminaire ideal for perimeters, soffits, coves or other commercial applications where modern lighting may be utilized in grid, sheet-rock or concealed-z ceilings.

# 34L-F / 34L-SG / 34L-G

3x4 LED

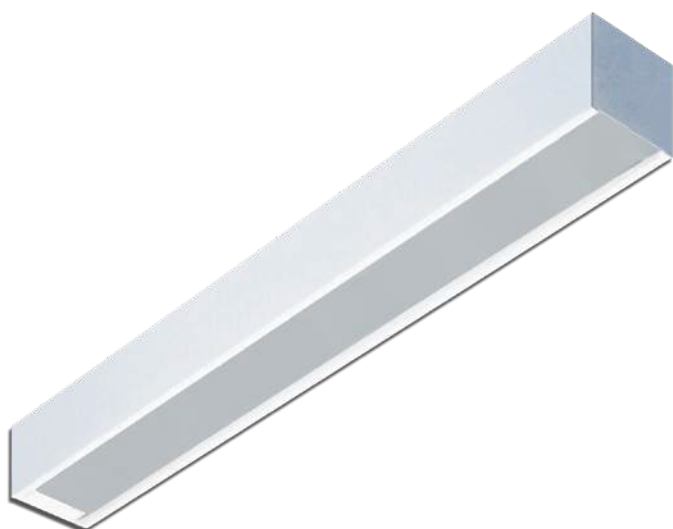

## Features and Specifications:

### Construction:

- Durable steel body formed from code gauge cold rolled steel and welded together for strength and uniformity
- Full wireway front is die formed for durability and attaches easily with screws. Ample knockouts are provided on back and ends for convenient installation and continuous through wiring
- Frosted acrylic LED formulation diffuser
- Easy "lift-and-shift" design for lamping and maintenance
- 34LF is supplied with lugs and adjustable end flange trims
- 34LG and 34LSG are supplied with integral grid clips to ensure a proper fit

### Size Options:

- Available in 2', 4', 6' and 8' lengths (nominal)

### Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

### Mounting Options:

- Recessed flanged or grid mount

### Driver:

- Universal voltage 120-277V standard
- Custom driver tuning available for specific lumen requirements
- 0-10V or Lutron dimming optional

### Warranty:

- 5 years - part replacement only (see our terms & conditions page at [www.lamarled.com](http://www.lamarled.com) for details)

See page 2 for lumen chart & dimensions

## Ordering Guide / Example

34L48GMFA-40

| 34L       |                                                                          |                                                                                                                                  |                                   |                                                                        |                                                      |                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------|--------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|------------------------------------------------------------------------|------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Series    | Size                                                                     | Mounting Options                                                                                                                 | Power                             | Lens Options                                                           | CCT                                                  | General Options                                                                                                                                                                                                                                                                                                                                                                                       |
| 34L = 3x4 | 24 = 2' nominal<br>48 = 4' nominal<br>72 = 6' nominal<br>96 = 8' nominal | F = Flanged for finished ceiling, sheetrock, plaster, concealed "Z"<br>G = T-bar or grid ceiling<br>SG = Slot grid T-bar ceiling | L = Low<br>M = Medium<br>H = High | FA = Frosted acrylic (LED formulation)<br>BLANK = Leave blank for none | 30 = 3000K<br>35 = 3500K<br>40 = 4000K<br>50 = 5000K | EM = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory)<br>D = 0-10V dimming to 1%<br>DTD = 0-10V Dim to Dark<br>LDH = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black<br>AWNRR = Lutron Athena wireless node integral fixture control (RF only)<br>AWNS = Lutron Athena wireless node integral fixture control (RF with daylight and occupancy sensing) |


Consult factory for additional options not shown or listed

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

## Project Information:

|            |               |
|------------|---------------|
| Job Name:  | Fixture Type: |
| Catalog #: | Date:         |
| Comments:  |               |



## Certification & Listings:

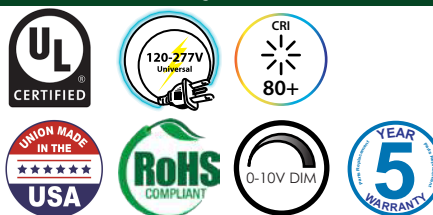

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

### Dimensions

#### END VIEW

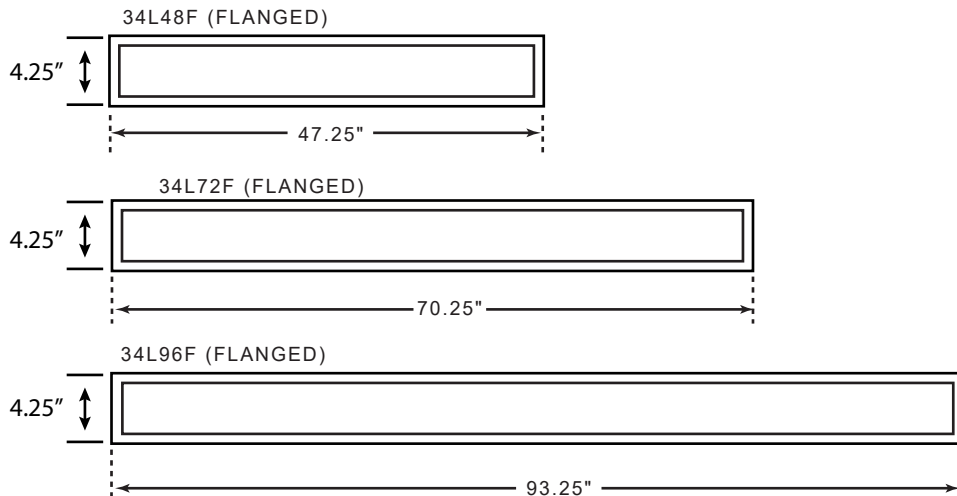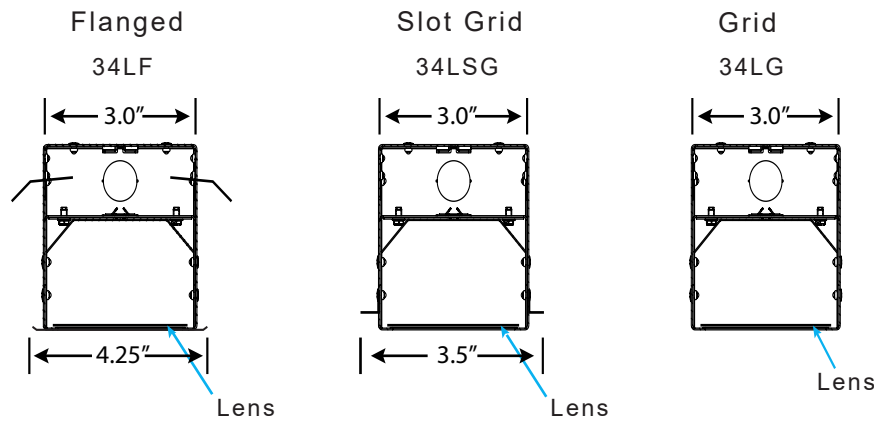

### Lumen Chart - FA Lens - 3000K

|    | Low           | Medium        | High          |
|----|---------------|---------------|---------------|
| 2' | 12W - 1480 lu | 17W - 1943 lu | 25W - 2820 lu |
| 4' | 24W - 2961 lu | 33W - 3886 lu | 50W - 5641 lu |

LAMAR LED assumes no responsibility for misapplication of fixtures  
Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 0826