


At only 4" wide, the 44LWDI fits discretely into many architectural applications. It is suitable for continuous runs and offers a clean, unbroken look. This unit features an illuminated edge that adds a unique quality that most narrow linears do not have.

44LWDI 4x4 linear wall direct/indirect

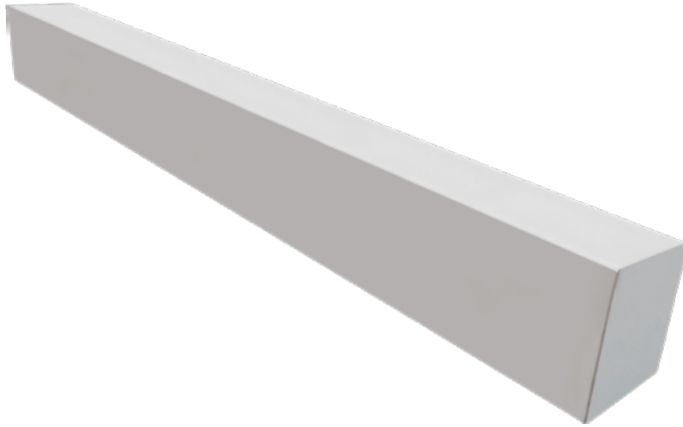

Features and Specifications:

Construction:

- Custom extruded diffuser offers high light transmission of over 85% with excellent LED diffusion, optional Crossblade Louver (replaces bottom lens)
- Precision fabricated steel housings are an economic alternative to extruded aluminum

Size Options:

- Available in 2', 4', 6' and 8' lengths (nominal)

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

Mounting Options:

- Wall mount

Driver:

- Universal voltage 120-277V standard
- Custom driver tuning available for specific lumen requirements
- 0-10V or Lutron dimming

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example

44LWDI48M35

| 44LWDI | | | | | |
|---------------|--|--|--|---|--|
| Series | Size | Power | CCT | General Options | Run Configuration |
| 44LWDI = Wall | 24 = 2' nominal 36 = 3' nominal 48 = 4' nominal 72 = 6' nominal 96 = 8' nominal | L = Low M = Medium H = High | 30 = 3000K 35 = 3500K 40 = 4000K (std) 50 = 5000K | CBL = Crossblade louver (and top lens) EM = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory - 3'-8' only) EMB = BABA Compliant Emergency pack >90 min., >500 lumens BLK = Black metal construction D = 0-10V dimming to 1% (standard) DTD = 0-10V Dim to Dark LDH = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black MX1 or MX2 = 2-wire 120V or 277V 5% phase cut dimming 2C = 2 circuit operation (1up/1down) (4'-8' only - no EM) | Blank = Individual BOR = Beginning of run (6' & 8' only) EOR = End of run (2'-8') INT = Intermediate (6' & 8' only) |

Consult factory for additional options not shown or listed
 Continuous runs shipped with feed thru wiring harness

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A


Project Information:

Job Name: _____ Fixture Type: _____

Catalog #: _____ Date: _____


Comments: _____

Certification & Listings:

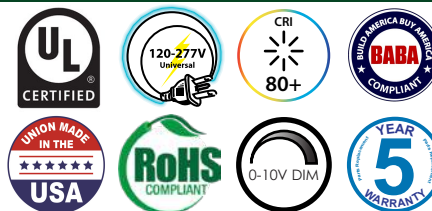

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

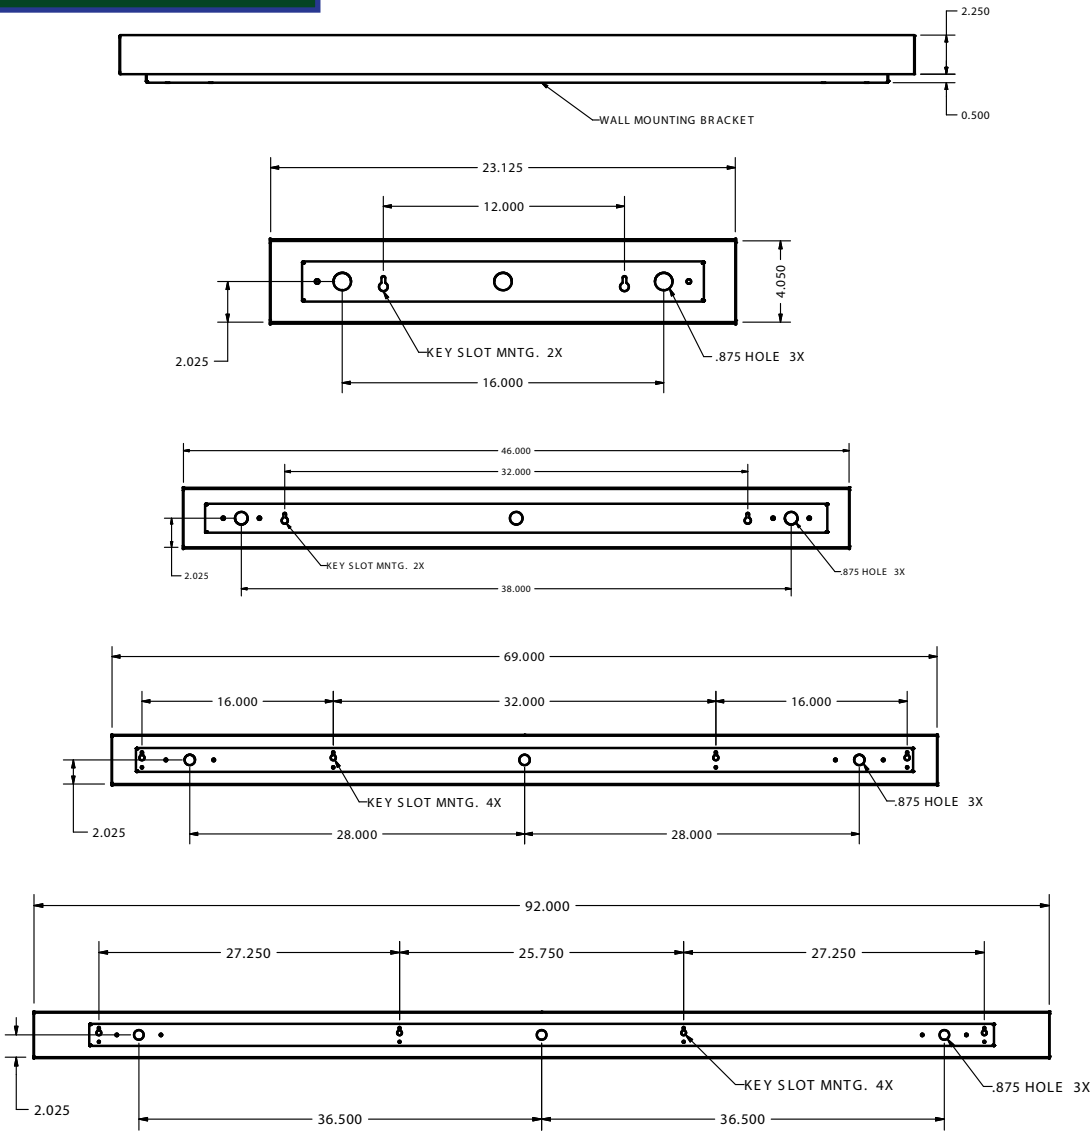

44LWDI Length Chart

| Size | |
|------|---------|
| 2' | 23.125" |
| 4' | 46" |
| 6' | 69" |
| 8' | 92" |

LED Lumen/Wattage Chart - 4000K

44LWDI 4'

| Low | Medium | High |
|---------|---------|---------|
| 47W | 64W | 100W |
| 4432 Lu | 5806 Lu | 8331 Lu |

Lumen Multipliers

| | |
|-------|------|
| 3000K | .95 |
| 3500K | .97 |
| 5000K | 1.03 |

LAMAR LED assumes no responsibility for misapplication of fixtures

Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 0724