



The INL is a general purpose industrial LED ideal for any application requiring reliable and efficient light sources such as garages, assembly lines and other industrial applications.

INL industrial open LED



Features and Specifications:

Construction:

- Durable steel bodies die-formed from cold rolled steel
- Aligner clips are available to keep reflectors aligned in continuous row applications

Size Options:

- Available 4' & 8' sizes (nominal)

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the
- USA Meets Buy America Act (BAA), BABA Compliant

Mounting Options:

- Surface, pendant or chain mount individually or in continuous rows

Driver:

- Universal voltage 120-277V standard
- 0-10V or Lutron dimming optional
- Custom driver tuning available for specific lumen requirements

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example

INL48M-40D

Series	Size	Power	CCT	General Options
INL				
INL = Industrial high bay	48 = 4' nominal 96 = 8' nominal	L = Low M = Medium H = High	30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K	EM = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory) EMB = BABA Compliant Emergency pack >90 min., >500 lumens D = 0-10V dimming to 1% DTD = 0-10V Dim to Dark LDH = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black MX1 or MX2 = 2-wire 120V or 277V 5% phase cut dimming

Consult factory for additional options not shown or listed

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Accessories (order separately)

VH = V-hanger for chain mounting
AL = Aligner clips


Project Information:

Job Name: _____ Fixture Type: _____

Catalog #: _____ Date: _____


Comments: _____

Certification & Listings:

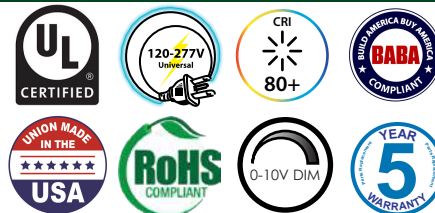

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

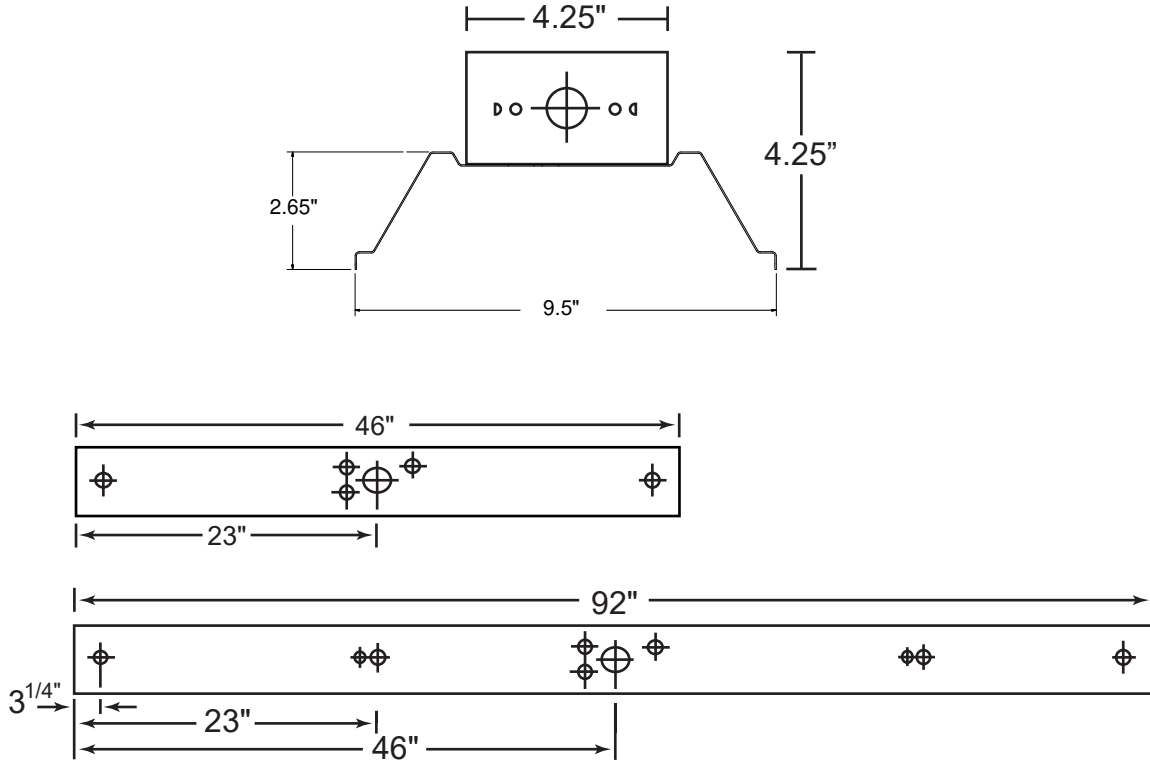

Lumen/Wattage Chart - 4000K

	4'	8'
Low	3625 Lu / 29W	7250 Lu / 58W
Med	6414 Lu / 50W	12,717 Lu / 98W
High	8155 Lu / 61W	16,310 Lu / 122W

CCT Multipliers

3000K	0.95
3500K	0.96
5000K	1.01