

LVL recessed angled lensed luminaire



Features and Specifications:

Construction:

- High reflectance components deliver main beam focus through the high transmission frosted acrylic lens
- Suitable for use in inverted T-Bar grid ceilings
- Integral grid clips

Size Options:

- Available in 2x2 and 2x4 sizes

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

Mounting Options:

Recessed grid mount

Driver:

- Universal voltage 120-277V standard
- 0-10V or Lutron dimming optional
- Custom driver tuning available for specific lumen requirements

Warranty:

5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for dimensions & lumen data chart

Ordering Guide / Example

LVL22M-35D

LVL				
Series	Size	Power	CCT	General Options
LVL = Angled Lensed LED	22 = 2x2 24 = 2x4	L = Low M = Medium H = High	30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K 930 = 3000K 90 CRI 935 = 3500K 90 CRI 940 = 4000K 90 CRI 950 = 5000K 90 CRI	EM = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory) EMB = BABA Compliant Emergency pack >90 min., >500 lumens D = 0-10V dimming to 1% DTD = 0-10V Dim to Dark LDH = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black MX1 or MX2 = 2-wire 120V or 277V 5% phase cut dimming W = 6ft Whip (dimming and/or EM leads included when necessary) Accessories FK2X2 = Flange kit (2x2) for Dry-wall installation FK2X4 = Flange kit (2x4) for Dry-wall installation


Consult factory for additional options not shown or listed

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Project Information:


Job Name:	Fixture Type:
Catalog #:	Date:
Comments:	

Certification & Listings:

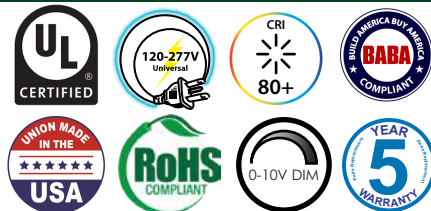

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

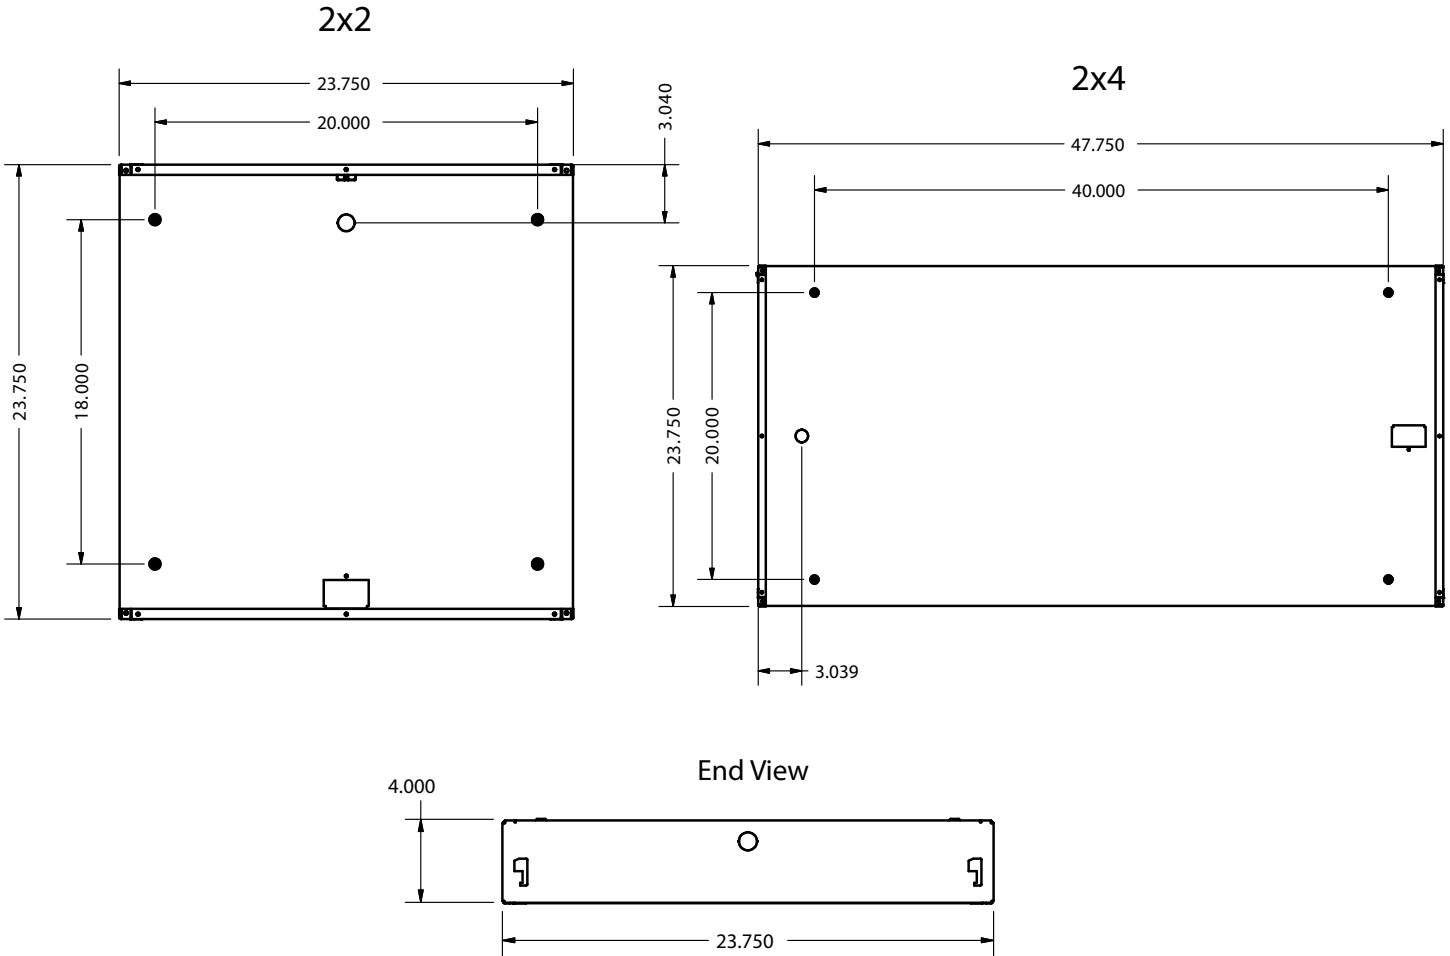

Lumen/Wattage Chart - 4000K

	Low	Medium	High
2x2	2197 Lu/19W	3037 Lu/26W	3814 Lu/32W
2x4	4065 Lu/34W	5441 Lu/45W	6754 Lu/57W

Lumen Multipliers	
3000K	0.952
3500K	0.968
5000K	1.03