

The MCRL series is ideal for residential, commercial or institutional applications such as stairwells, dormitories or other applications with low ceiling heights.

# MCRL mini corner mount LED



For illustration use only

## Features and Specifications:

### Construction:

- Die formed code gauge cold rolled steel bodies for strength and uniformity
- Lens is a frosted LED formulation acrylic (std)
- Door is hinged flush white steel (optional tamperproof screws)

### Size Options:

- Available in 2' and 4' lengths (nominal)

### Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the
- USA Meets Buy America Act (BAA), BABA Compliant

### Mounting Options:

- Wall/Corner mount

### Driver:

- Universal voltage 120-277V standard
- 0-10V or Lutron dimming optional
- Custom driver tuning available for specific lumen requirements

### Warranty:

- 5 years - part replacement only (see our terms & conditions page at [www.lamarled.com](http://www.lamarled.com) for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example

MCRL48M-40

MCRL				
Series	Size	Power	CCT	General Options
MCRL = Corner mount LED	24 = 2' (nominal) 48 = 4' (nominal)	L = Low M = Medium H = High	30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K	<b>EM</b> = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory) <b>EMB</b> = BABA Compliant Emergency pack >90 min., >500 lumens <b>D</b> = 0-10V dimming to 1% <b>DTD</b> = 0-10V Dim to Dark <b>LDH</b> = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black <b>MX1 or MX2</b> = 2-wire 120V or 277V 5% phase cut dimming <b>TP</b> = Tamperproof screws <b>AWN</b> = Lutron Athena wireless node integral fixture control (RF only) <b>AWNS</b> = Lutron Athena wireless node integral fixture control (RF with daylight and occupancy sensing)

Consult factory for additional options not shown or listed

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A


### Project Information:

Job Name: \_\_\_\_\_ Fixture Type: \_\_\_\_\_

Catalog #: \_\_\_\_\_ Date: \_\_\_\_\_


Comments: \_\_\_\_\_

### Certification & Listings:

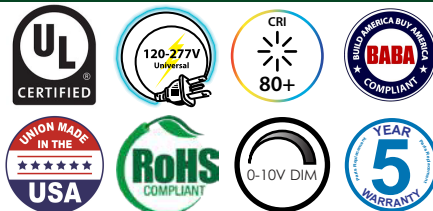

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

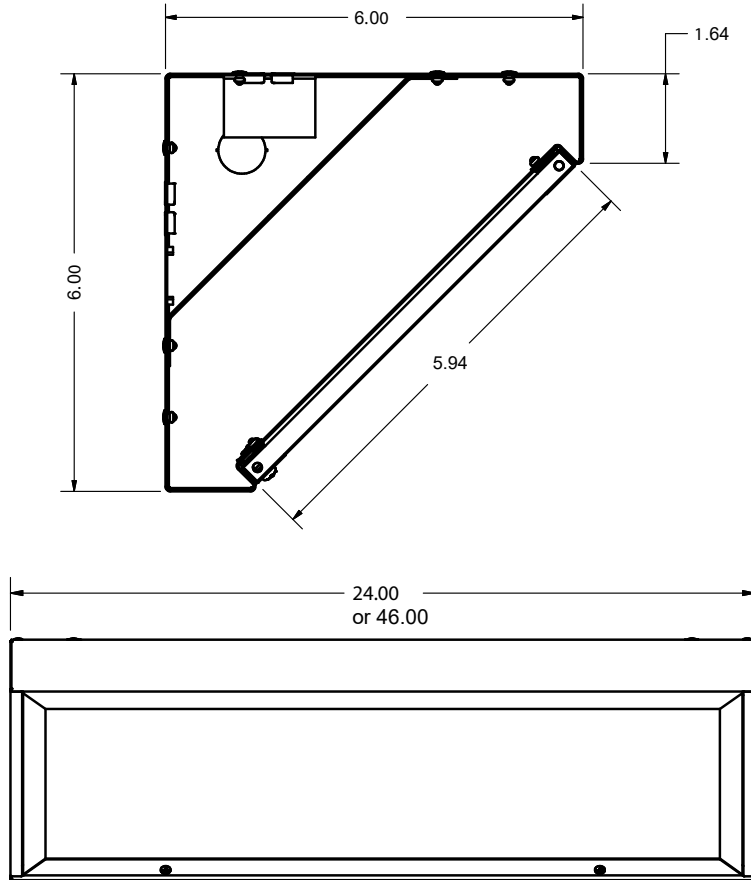

Lumen/Wattage Chart - 4' 4000K

	4' 4000K	Lumen Multipliers	
Low	2365 Lu / 24W	3000K	.952
Med	3260 Lu / 35.4W	3500K	.968
High	4095 Lu / 47.3W	5000K	1.03