



At only 2.25" wide, the NLRSF/NLRF fits discretely into many architectural applications. It is suitable for installations in plaster or dry wall type ceilings in single or continuous runs.

NLRSF/NLRF

narrow linear | spackle flanged/flanged



Shown in unfinished ceiling without lens

For supporting NLRF (flanged) and NLRSF (spackle flanged) units we recommend wood framing or threaded rod secured to structure above (by others)

Features and Specifications:

Construction:

- Custom extruded diffuser offers high light transmission of over 85% with excellent LED diffusion
- Precision fabricated steel housings are an economic alternative to extruded aluminum

Size Options:

- Available in 2', 4', 6' and 8' lengths (nominal)

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

Mounting Options:

- Recessed plaster or dry wall

Note: NLRF models must be framed out by others and secured to frame above or alongside

Driver:

- Universal voltage 120-277V standard
- Custom driver tuning available for specific lumen requirements
- 0-10V or Lutron dimming optional

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example

NLR48MFA-35D

Series	Size	Power	Lens Options	CCT	General Options	Run Configuration
NLRSF = Spackle flanged NLRF = Flanged	24 = 2' nominal 36 = 3' nominal 48 = 4' nominal 72 = 6' nominal 96 = 8' nominal	L = Low M = Medium H = High	FA = Flat acrylic	80 CRI 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K 90 CRI 930 = 3000K 935 = 3500K 940 = 4000K 950 = 5000K	D = 0-10V dimming to 1% DTD = 0-10V Dim to Dark LDH = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black	Blank = Individual BOR = Beginning of run EOR = End of run INT = Intermediate

Consult factory for additional options not shown or listed & for continuous run ordering code

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Project Information:

Job Name:


Fixture Type:

Catalog #:

Date:

Comments:

Certification & Listings:

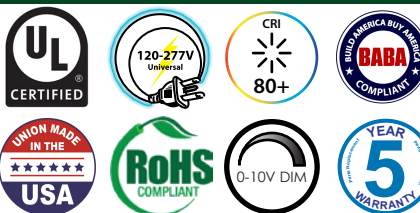


BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

NOTE: Continuous row housing length same as individual

Dimensions

Narrow Linear Recessed – ‘Mud-In’ dry-wall (NLRSF), Flanged dry-wall (NLRF)

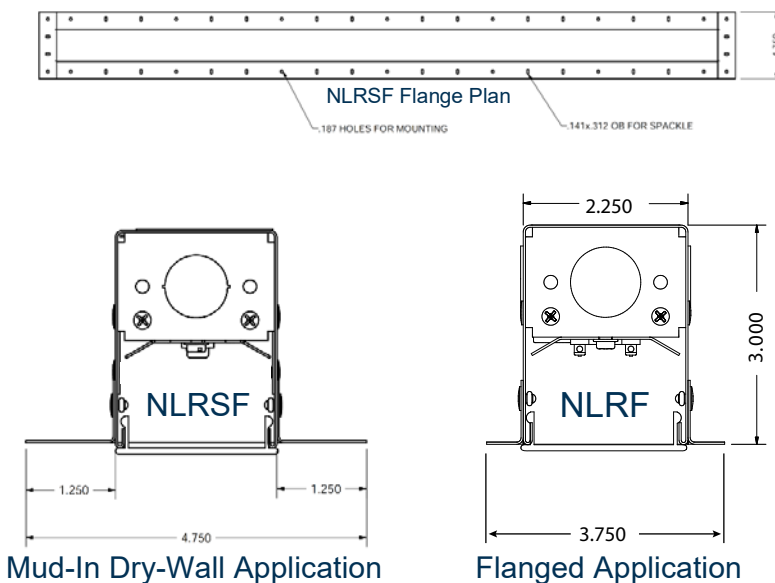

NLRF

Nominal Length	Housing Length	NLRSF	NLRF
Inches (ref)			
2'	23.00	25.63	24.50
4'	46.00	48.63	47.50
6'	69.00	71.63	70.50
8'	92.00	94.63	93.50
Width	2.25	4.75	3.75

****See Note Below**

Rough-In Dimensions - Add 1/2" to housing size

Size	INT	BOR-EOR
2'	23"	23.75"
4'	46"	46.75"
6'	69"	69.75"
8'	92"	92.75"

LED Lumen/Wattage Chart - 4000K

Low	Medium	High
24W	33W	40W
2455 Lu	3210 Lu	3788 Lu

Lumen Multipliers

3000K	.95
3500K	.97
5000K	1.03