



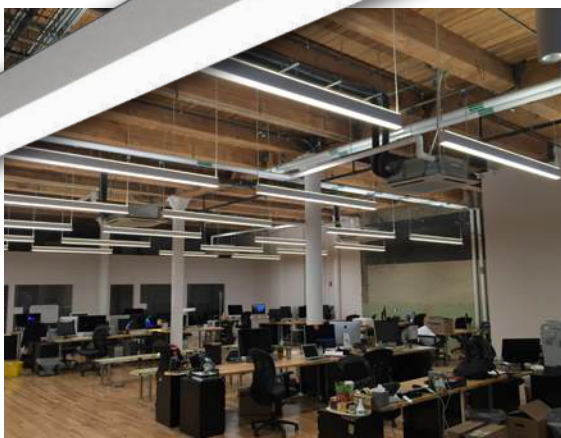

At only 2.25" wide, the NLSDI fits discretely into many architectural applications. It is suitable for continuous runs and offers a clean, unbroken look. This unit features an illuminated edge that adds a unique quality that most narrow linears do not have.

NLSDI narrow linear suspended direct/indirect w/multi-color tuning



Features and Specifications:

Construction:

- Custom extruded diffuser offers high light transmission of over 85% with excellent LED diffusion
- Precision fabricated steel housings are an economic alternative to extruded aluminum
- New Multi-Color Tuning LED board arrays - Field selectable 3000K, 3500K or 4000K

Size Options:

- Available in 2', 4', 6' and 8' lengths (nominal)

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

Mounting Options:

- Cable mount (4ft AC cable included, custom lengths available)
- Standard cable set uses "Y" adapter, optional Single Support cable available

Driver:

- Universal voltage 120-277V standard
- Custom driver tuning available for specific lumen requirements
- 0-10V or Lutron dimming

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example		NLSDI48M-MCT-D			
NLSDI		MCT			
Series	Size	Power	CCT	General Options	Run Configuration
NLSDI = Suspended direct/indirect	24 = 2' nominal 48 = 4' nominal 72 = 6' nominal 96 = 8' nominal	L = Low M = Medium H = High	MCT = Field Selectable CCT 3000K, 3500K or 4000K	EM = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory) EMB = BABA Compliant Emergency pack >90 min., >500 lumens BLK = Black metal construction (w/Black AC cable set) D = 0-10V dimming to 1% (equipped standard) DTD = 0-10V Dim to Dark LDH = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black ACS = 4' adjustable aircraft cable kit single support AC6 = 6' adjustable aircraft cable kit ("Y") add S for single AC8 = 8' adjustable aircraft cable kit ("Y") add S for single AC10 = 10' adjustable aircraft cable kit ("Y") add S for single 2C = 2 circuit operation (1 up/1down) (4'-8' only - no EM)	Blank = Individual BOR = Beginning of run (6' & 8' only) EOR = End of run (2'-8') INT = Intermediate (6' & 8' only)

Consult factory for additional options not shown or listed
Includes 4ft adjustable AC cable kit std and a pre-wired power drop, Continuous runs shipped with feed thru wiring harness

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Project Information:


Job Name:	Fixture Type:
Catalog #:	Date:
Comments:	

Certification & Listings:



BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

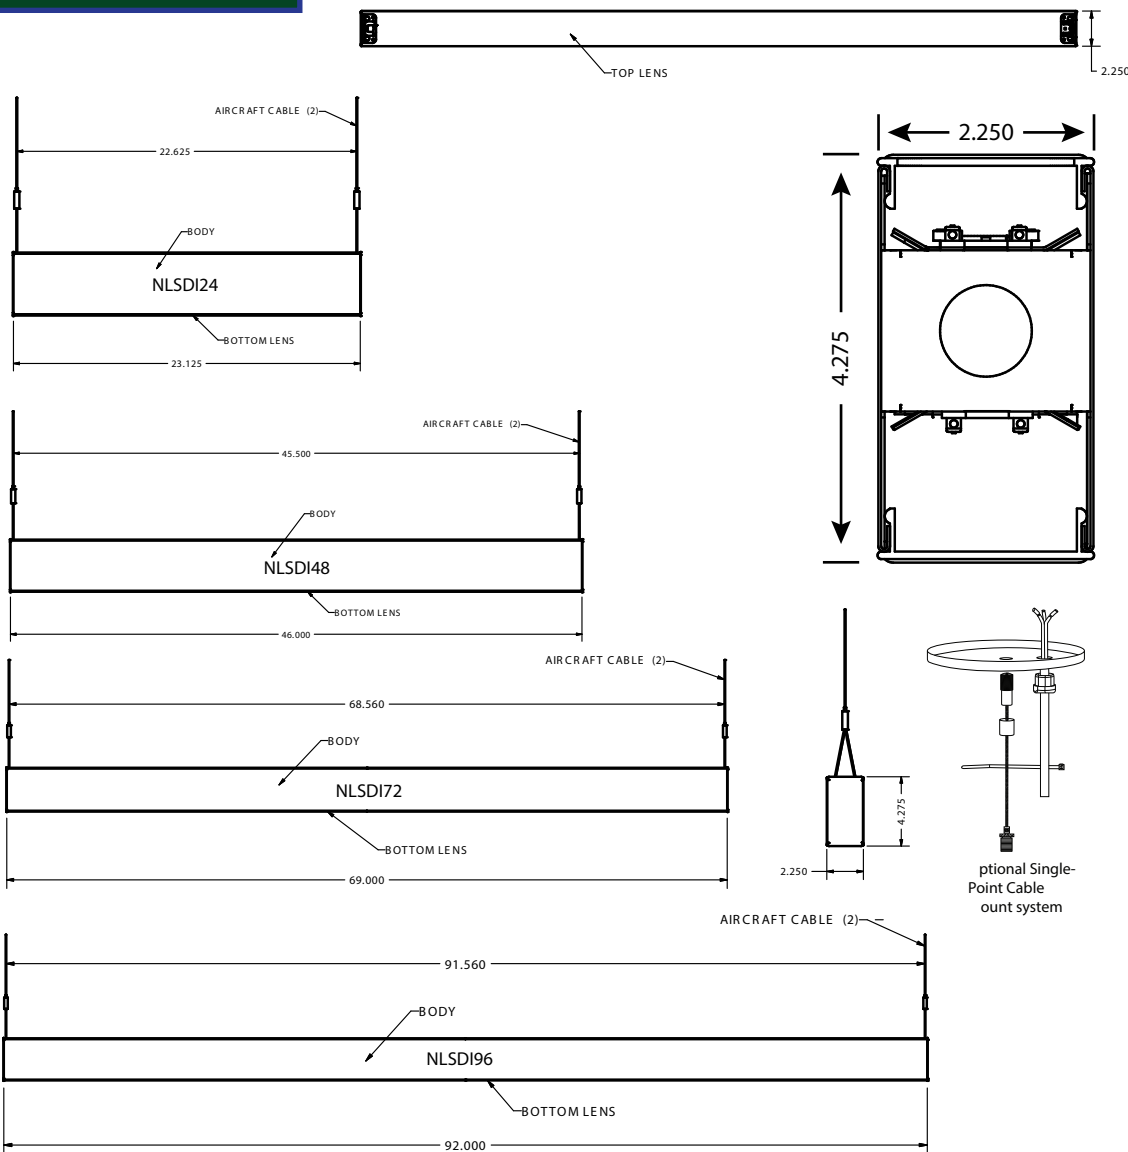

Cable Mounting Detail



Length Chart

Size	
2'	23.125"
4'	46"
6'	69"
8'	92"


LED Lumen/Wattage Chart - 4000K

NLSDI-MCT 4'


Low	Medium	High
47W	64W	100W
4924 Lu	6451 Lu	9256 Lu

Lumen Multipliers

3000K	.95
3500K	.97
5000K	1.03



Field adjustable CCT (Multi-Color Tuning)
Choice of 3000K, 3500K or 4000K (factory preset)
Note: Each board must be switched individually

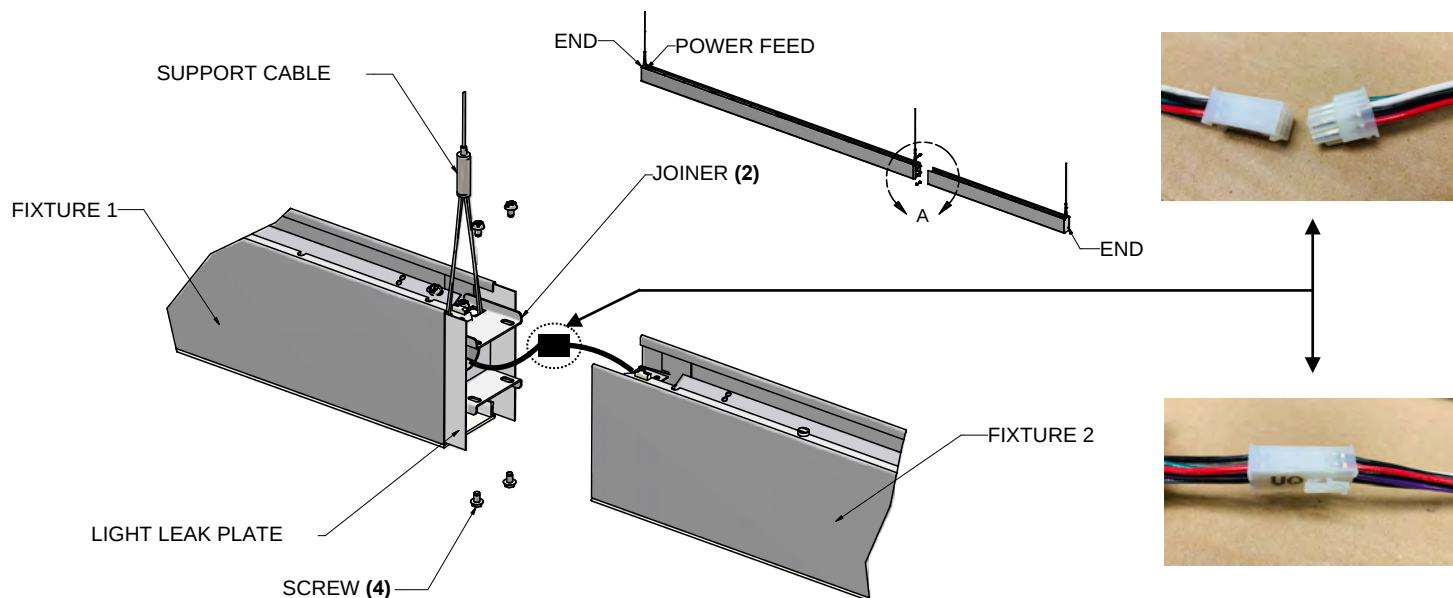

Continuous Run