




At only 2.25" wide, the NLSI fits discretely into many architectural applications. It is suitable for continuous runs and offers a clean, unbroken look.

NLSI narrow linear indirect suspended

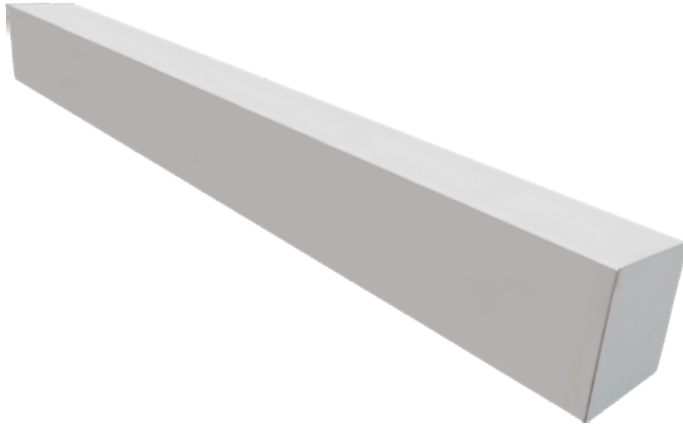

Features and Specifications:

Construction:

- Custom extruded diffuser offers high light transmission with excellent LED diffusion
- Precision fabricated steel housings are an economic alternative to extruded aluminum

Size Options:

- Available in 2', 3, 4', 6' and 8' lengths (nominal)

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

Mounting Options:

- Cable mount

Driver:

- Universal voltage 120-277V standard
- Custom driver tuning available for specific lumen requirements
- 0-10V or Lutron dimming

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example

NLSI48M-40D


NLSI					
Series	Size	Power	CCT	General Options	Run Configuration
NLSI = Indirect suspended	24 = 2' nominal 36 = 3' nominal 48 = 4' nominal 72 = 6' nominal 96 = 8' nominal	L = Low M = Medium H = High	30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K	EM = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory) EMB = BABA Compliant Emergency pack >90 min., >500 lumens BLK = Black metal construction (w/Black AC cable set) D = 0-10V dimming to 1% (standard) DTD = 0-10V Dim to Dark LDH = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black MX1 or MX2 = 2-wire 120V or 277V 5% phase cut dimming	Blank = Individual BOR = Beginning of run (6' & 8' only) EOR = End of run (2'-8') INT = Intermediate (6' & 8' only)

Consult factory for additional options not shown or listed
 Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A
 4ft AC cable kits and pre-wired power drop included, other lengths available - consult factory
 Feed through wiring is included for continuous run models (BOR, INT and EOR)

Project Information:


Job Name: _____ Fixture Type: _____
 Catalog #: _____ Date: _____
 Comments: _____

Certification & Listings:

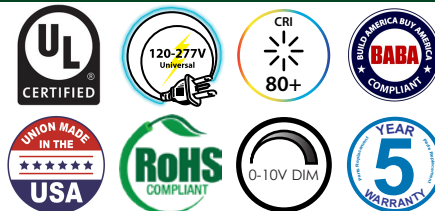

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

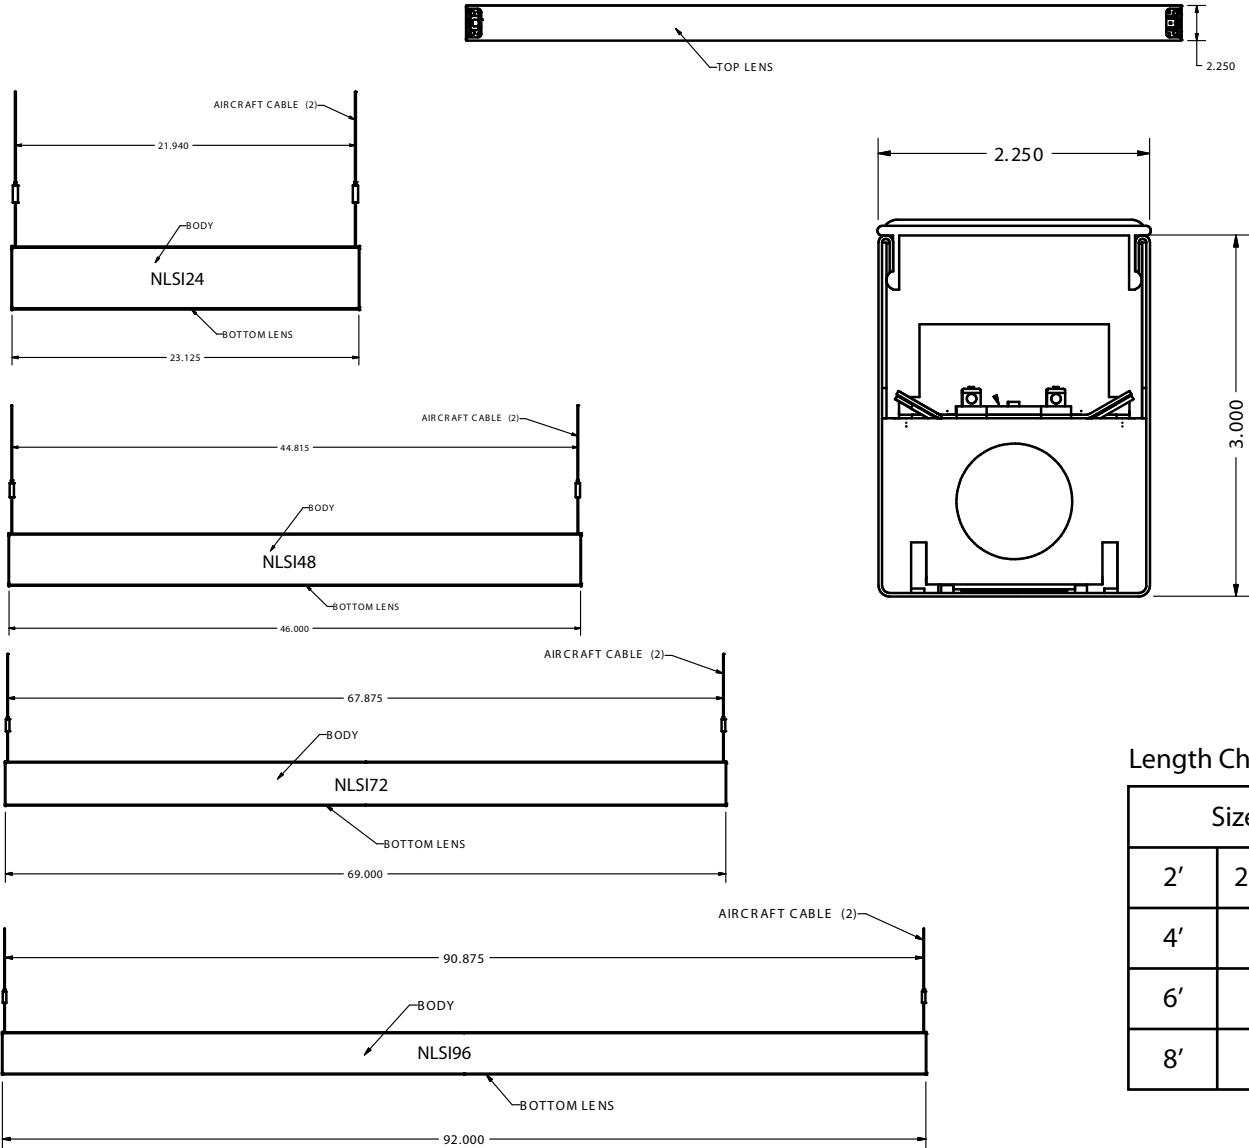

Length Chart

Size	
2'	23.125"
4'	46"
6'	69"
8'	92"

LED Lumen/Wattage Chart - 4000K

NLSI 4'

Low	Medium	High
24W	33W	52W
2455 Lu	3210 Lu	4614 Lu

Lumen Multipliers

3000K	.95
3500K	.97
5000K	1.03

LAMAR LED assumes no responsibility for misapplication of fixtures

Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 0724