



The S-LED series is an all-purpose LED strip luminaire ideal for a wide assortment of retail, commercial or residential applications. Luminaire is suitable for installation within a clothes closet storage space

Features and Specifications:

Construction:

- Durable steel body die-formed from code gauge cold rolled steel
- One piece extruded frosted PMMA diffuser
- Post painted powder coat finish

Size Options:

- Available in 2', 4', and 8' lengths (nominal)

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified

Mounting Options:

- Surface or suspended mount (Surface mtg brackets included)

Driver:

- Universal voltage 120-277V standard
- Field adjustable CCT (3500K-5000K) and Lumen output (power)
- 0-10V Dimming standard

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)
- See page 2 for dimensions and performance specifications

S-LED strip LED



Ordering Guide / Example

S-LED-4-44PS-8CSA

S-LED	4-44PS	8CSA	
Series	Size	CCT/Power	General Options
S-LED = Strip	2-25PS = 2' nominal 4-44PS = 4' nominal 8-90PS = 8' nominal	8CSA Adjustable CCT: 3500, 4000 or 5000K Adjustable power: 2FT - 15, 20 or 25W 4FT - 18, 28 or 44W 8FT - 54, 75 or 90W	EM5 = Emergency pack >90 min., >500 lumens EM12 = Emergency pack >90 min., >1400 lumens OSPIR = Passive Infrared Sensor VHK = V-Hook and 40" chain kit (set of 2)


Consult factory for additional options not shown or listed

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Project Information:





Job Name:	Fixture Type:
Catalog #:	Date:
Comments:	

Certification & Listings:

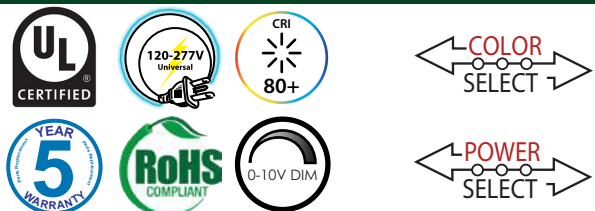

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

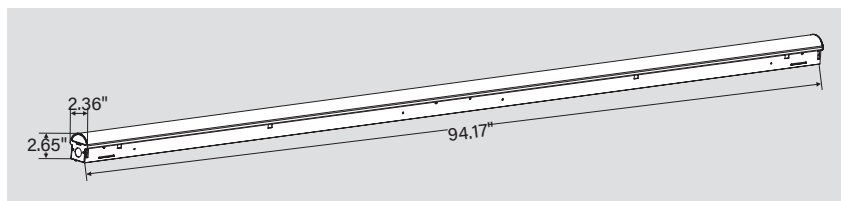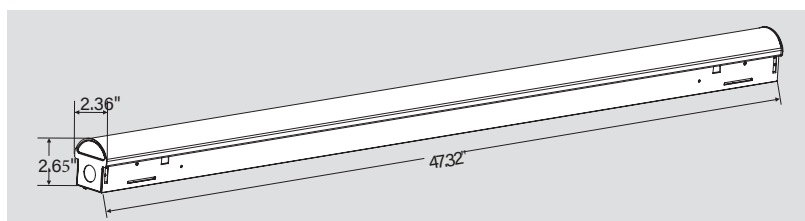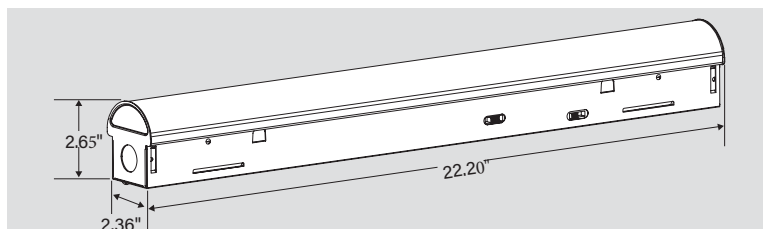

Optional V-YHook Kit




Shown with optional PIR sensor


Performance Specifications

PHOTOMETRIC SPECIFICATIONS 4FT MODEL

ISOCANDELA PLOT

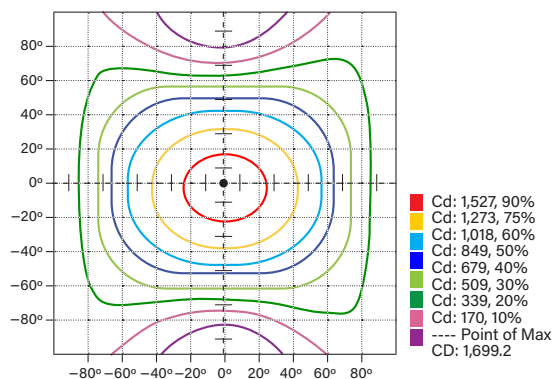

POLAR CANDELA DISTRIBUTION

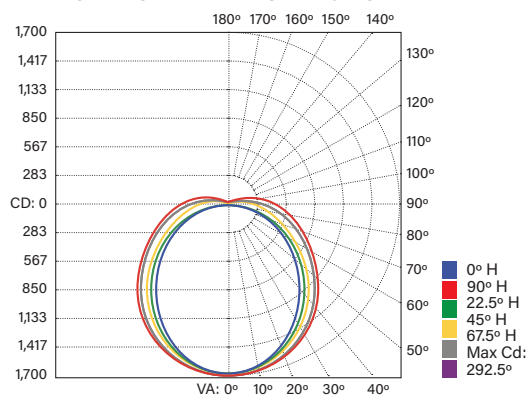

ZONAL LUMEN SUMMARY

Zone	Lumens	% Lumi-naire
0-30	1,295.9	21.9%
0-40	2,122.9	35.9%
0-60	3,804.3	64.3%
60-90	1,556.1	26.3%
70-100	1,110.0	18.8%
90-120	457.1	7.7%
0-90	5,360.4	90.6%
90-180	553.4	9.4%
0-180	5,913.8	100%

LAMAR LED assumes no responsibility for misapplication of fixtures

Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 0625