
clear-vu lighting

SERIES 4061A

LED Panel Light Fixture

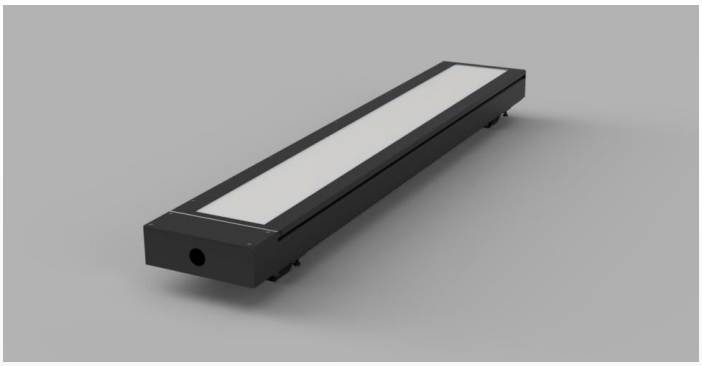

SPECIFICATIONS

Housing: Extruded aluminum 0.125" thick low-profile housing

Optics: LED light source > 50,000 hours, symmetric distribution (optional asymmetric)

Lens: .187" thick cast polycarbonate with nano antistatic coating

Electrical: Universal 95-295VAC standard, optional hybrid (120VAC & 600VDC drivers with charging indicator and magnetic test switch)

Optional Battery: 4-Hour NiMH battery with self diagnostics

Operating Range: -20° to 130°F

Component Cover: 1/16" thick aluminum

Safety Cable: Heavy gauge stainless steel aircraft cable

Hinge: Continuous hinge light engine

Hardware: Stainless steel tamper resistant T15 center pin

Fuse: In-Line


Connections: Quick-connect

Listings & Certifications: ETL listed, IK10, IP65, LM79/LM80


5 Year Warranty • Made in USA

MOUNTING BRACKET


SURFACE

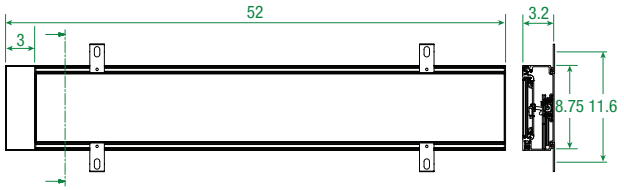

PENDANT

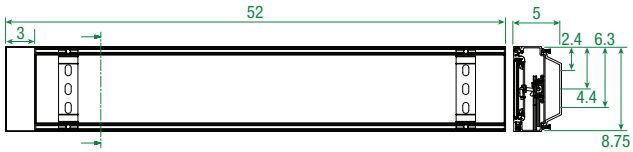

PHOTOMETRICS



PROJECT INFORMATION

Date _____

Fixture Type _____

Project Name _____

Catalog Number _____

Approved By _____

ORDERING INFORMATION

SERIES		TYPE		COLOR TEMP		LENGTH		PAINT COLOR		LUMEN OUTPUT		POWER INPUTS		MOUNTING
SL	–	4061A	–		–		–		–		–		–	
				35=3,500K **40**=4,000K **50**=5,000K		**4**=4' **6**=6'		**01**=Light Grey **02**=Argento **03**=Jet Black **06**=Platinum		**3500**=3,500lm **5250**=5,250lm		**U**=Universal (95-295VAC) **HY1**=Hybrid; 120VAC & 600VDC & Battery **UB**=120VAC & Battery		**S**=Surface **P**=Pendant

012920

1150 Motor Parkway | Central Islip, NY 11722 | 516.941.3737 | info@clearvulighting.com