

TRSDI Triton | triangular linear suspended direct/indirect



Features and Specifications:

Construction:

- Custom extruded diffuser offers high light transmission of over 85% with excellent LED diffusion
- Precision fabricated steel housings are an economic alternative to extruded aluminum

Size Options:

- Available in 2', 3', 4', 6' and 8' lengths (nominal)

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

Mounting Options:

- Cable mount (4' AC cable included)

Driver:

- Universal voltage 120-277V standard
- Custom driver tuning available for specific lumen requirements
- 0-10V or Lutron dimming

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example

TRSDI48M-40D

TRSDI					
Series	Size	Power	CCT	General Options	Run Configuration
TRSDI = Suspended direct/indirect	24 = 2' nominal 36 = 3' nominal* 48 = 4' nominal 72 = 6' nominal 96 = 8' nominal	L = Low M = Medium H = High	30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K	EM = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory - 3'-8' only) EMB = BABA Compliant Emergency pack >90 min., >500 lumens BLK = Black metal construction (W/Black AC cable set) D = 0-10V dimming to 1% (standard) DTD = 0-10V Dim to Dark LDH = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black AC6 = 6ft adjustable aircraft cable kit AC8 = 8ft adjustable aircraft cable kit AC10 = 10ft adjustable aircraft cable kit 2C = 2 circuit operation (1up/1down) (4'-8' only - no EM)	Blank = Individual BOR = Beginning of run (6' & 8' only) EOR = End of run (2'-8') INT = Intermediate (6' & 8' only)


Consult factory for additional options not shown or listed Includes 4ft adjustable AC cable kit std and a pre-wired power drop Continuous runs shipped with feed thru wiring harness

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A
*Custom order on request - Minimum order quantities apply
AC cable kit available in custom lengths (in 2' increments)

Project Information:







Job Name:	Fixture Type:
Catalog #:	Date:
Comments:	

Certification & Listings:

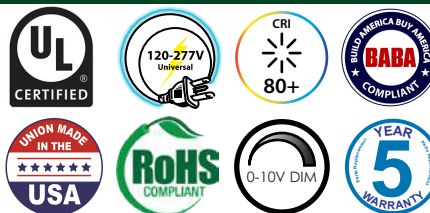

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

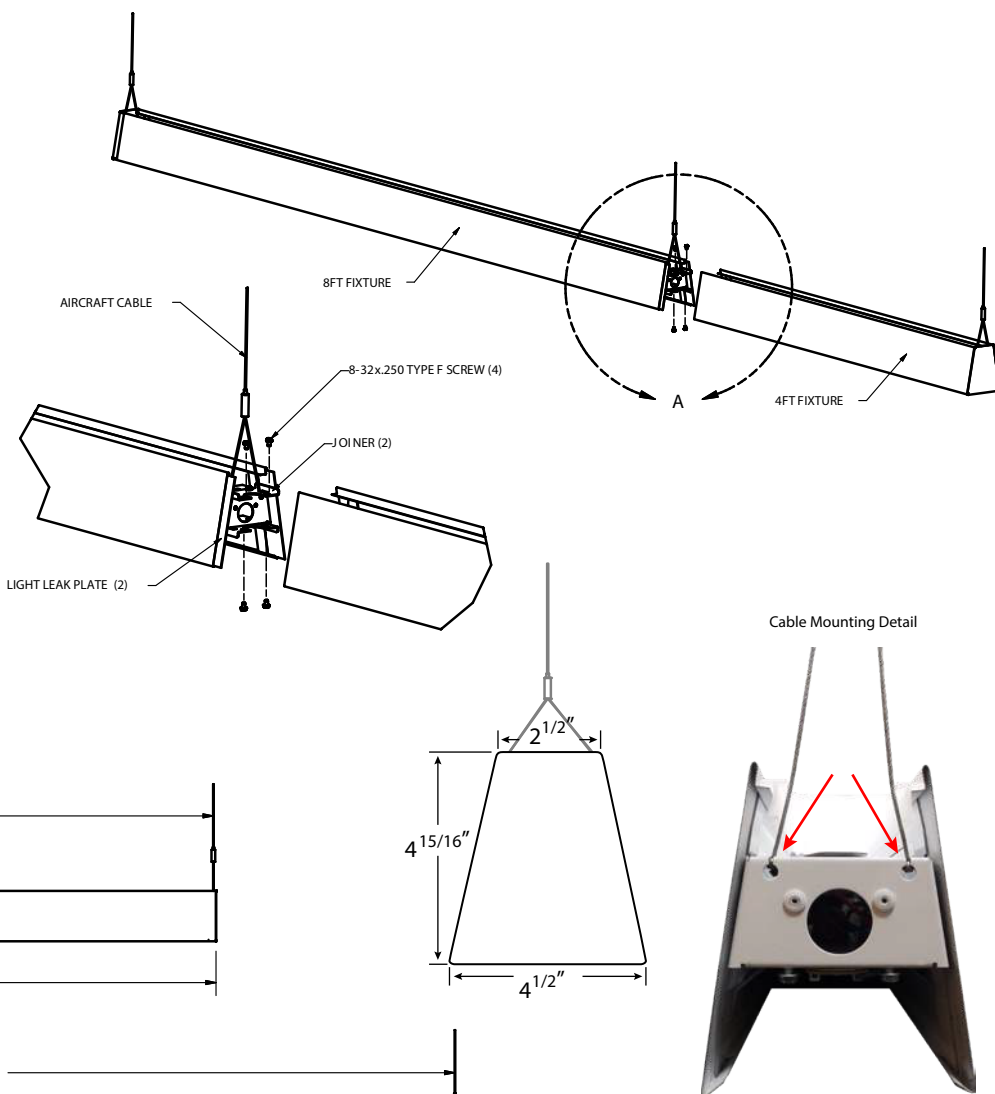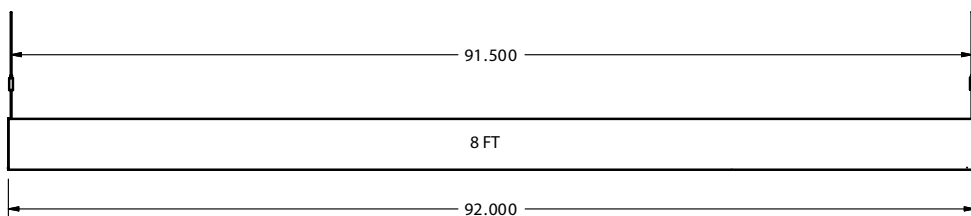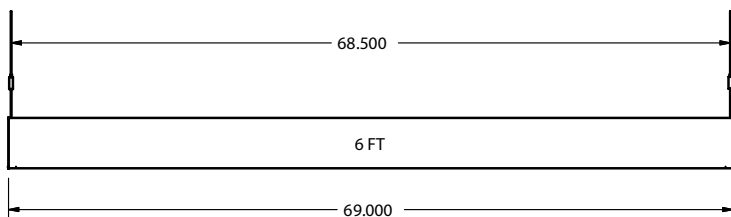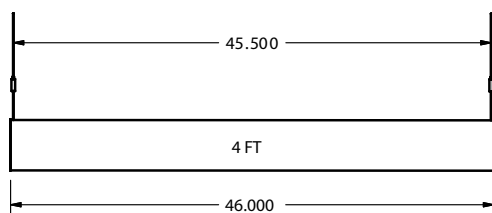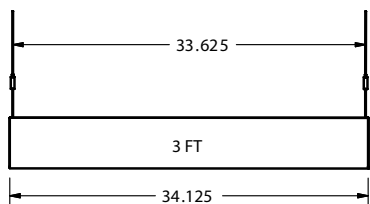

LED Lumen/Wattage Chart - 4000K

TRSDI 4'

Low	Medium	High
47W	63W	98W
5634 Lu	7394 Lu	10735 Lu

Lumen Multipliers

3000K	.95
3500K	.96
5000K	1.01