
LAMARLED

The MINLL is a heavy-duty, LED industrial that is ideal for areas requiring compact light sources

MINLL mini narrow industrial w/lens

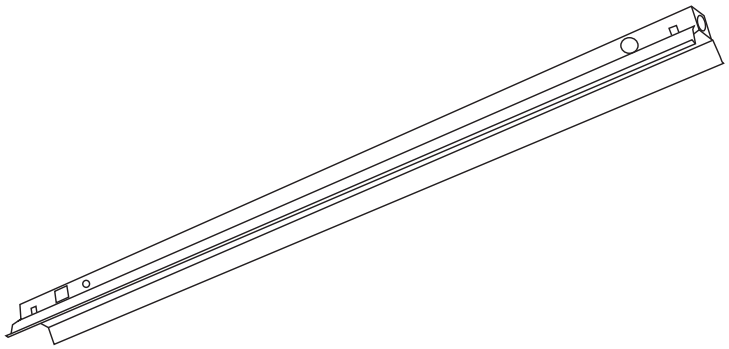

Features and Specifications:

Construction:

- Durable steel body and reflector
- Snap-on frosted polycarbonate lens, injection molded end caps
- Wireway covers attach simply with screws for easy maintenance

Size Options:

- Available in 2', 4', 6' and 8' lengths (nominal)

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

Mounting Options:

- Surface, suspended or chain mount

Driver:

- Universal voltage 120-277V standard
- Custom driver tuning available for specific lumen requirements
- 0-10V or Lutron dimming optional

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example

MINLL48M-40D

MINLL				
Series	Size	Power	CCT	General Options
MINLL = mini narrow industrial	**24** = 2' nominal **36** = 3' nominal* **48** = 4' nominal **72** = 6' nominal **96** = 8' nominal	**L** = Low **M** = Medium **H** = High	**30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K	**EM** = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory) **EMB** = BABA Compliant Emergency pack >90 min., >500 lumens **D** = 0-10V dimming to 1% **DTD** = 0-10V Dim to Dark **LDH** = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black

Consult factory for additional options not shown or listed Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

*Custom order on request - Minimum order quantities apply

Multiple cord options are available - consult factory

Project Information:

Job Name: _____ Fixture Type: _____

Catalog #: _____ Date: _____

Comments: _____

Certification & Listings:


UL CERTIFIED · 120-277V Universal · CRI 80+ · BUILT AMERICA BUY AMERICA COMPLIANT BABA · UNION MADE IN THE USA · RoHS COMPLIANT · 0-10V DIM · 5 YEAR WARRANTY

LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com

MINLL mini narrow industrial

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

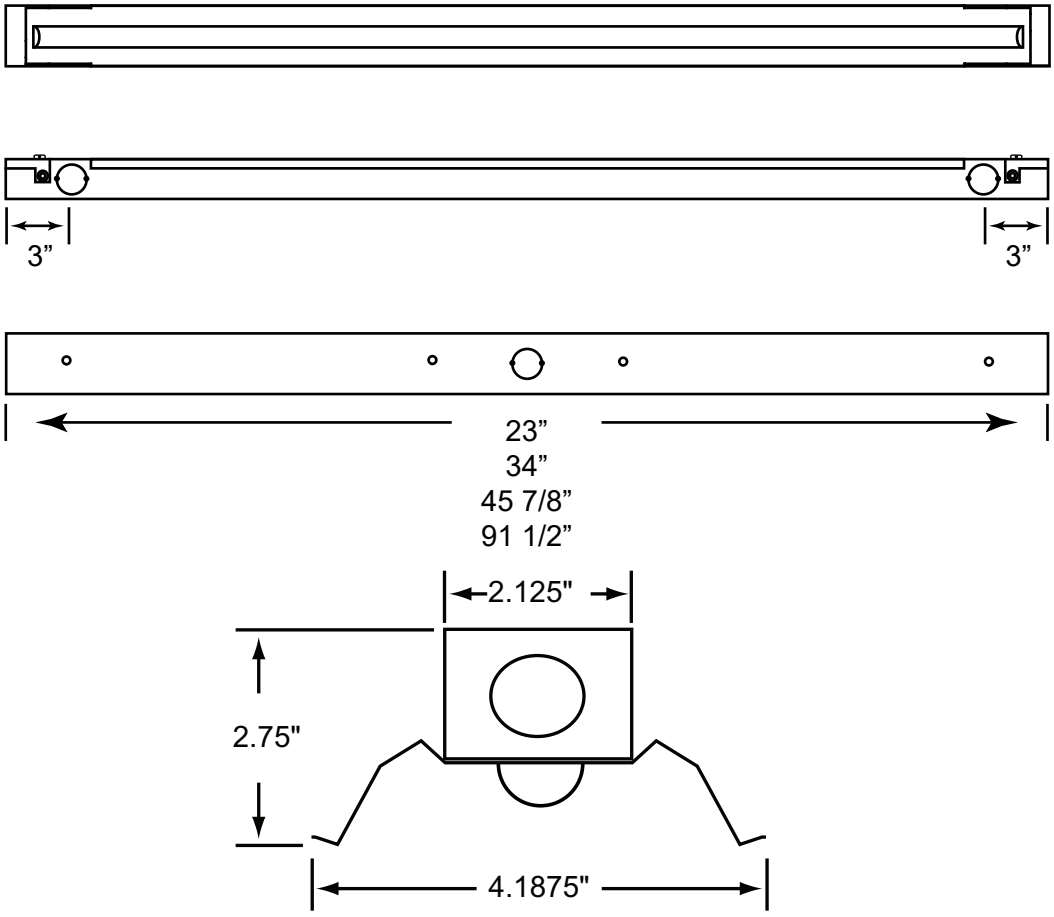

Lumen/Wattage Chart - 4000K

4000K	Low	Med	High
4’	2507 19W	4074 33W	5915 51W
8’	5014 38W	8148 66W	11,830 102W

LAMAR LED assumes no responsibility for misapplication of fixtures
Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 0826