



The LFL offers the look of contemporary fluorescent lighting with the efficiency and low maintenance of LED technology. This series is ideal for use in offices, hospitals and schools.

LFL lay-in formed lens



Features and Specifications:

Construction:

- Linear arrayed LED modules provide even illumination and are field replaceable
- Formed lens is retained in hinged door frame
- Suitable for use in inverted T-bar grid ceilings
- Made from code gauge steel
- Integral grid clips

Size Options:

- Available in 2x2 or 2x4 sizes

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the
- USA Meets Buy America Act (BAA), BABA Compliant

Mounting Options:

- Recessed grid mount

Driver:

- Universal voltage 120-277V standard
- Custom driver tuning available for specific lumen requirements
- 0-10V or Lutron dimming optional

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

Ordering Guide / Example

LFL22M-35D

LFL				
Series	Lumens	Power	CCT	General Options
LFL = Lay-in formed lens	22 = 2x2 24 = 2x4	L = Low M = Medium H = High	30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K	EM = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory) EMB = BABA Compliant Emergency pack >90 min., >500 lumens D = 0-10V dimming to 1% DTD = 0-10V Dim to Dark LDH = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black MX1 or MX2 = 2-wire 120V or 277V 5% phase cut dimming W = 6ft Whip (Dimming and/or EM leads included when necessary) Accessories FK2X2 = Flange kit (2x2) for Dry-wall installation FK2X4 = Flange kit (2x4) for Dry-wall installation

Consult factory for additional options not shown or listed

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A


Project Information:

Job Name: _____ Fixture Type: _____

Catalog #: _____ Date: _____


Comments: _____

Certification & Listings:

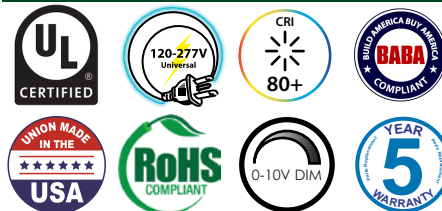

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

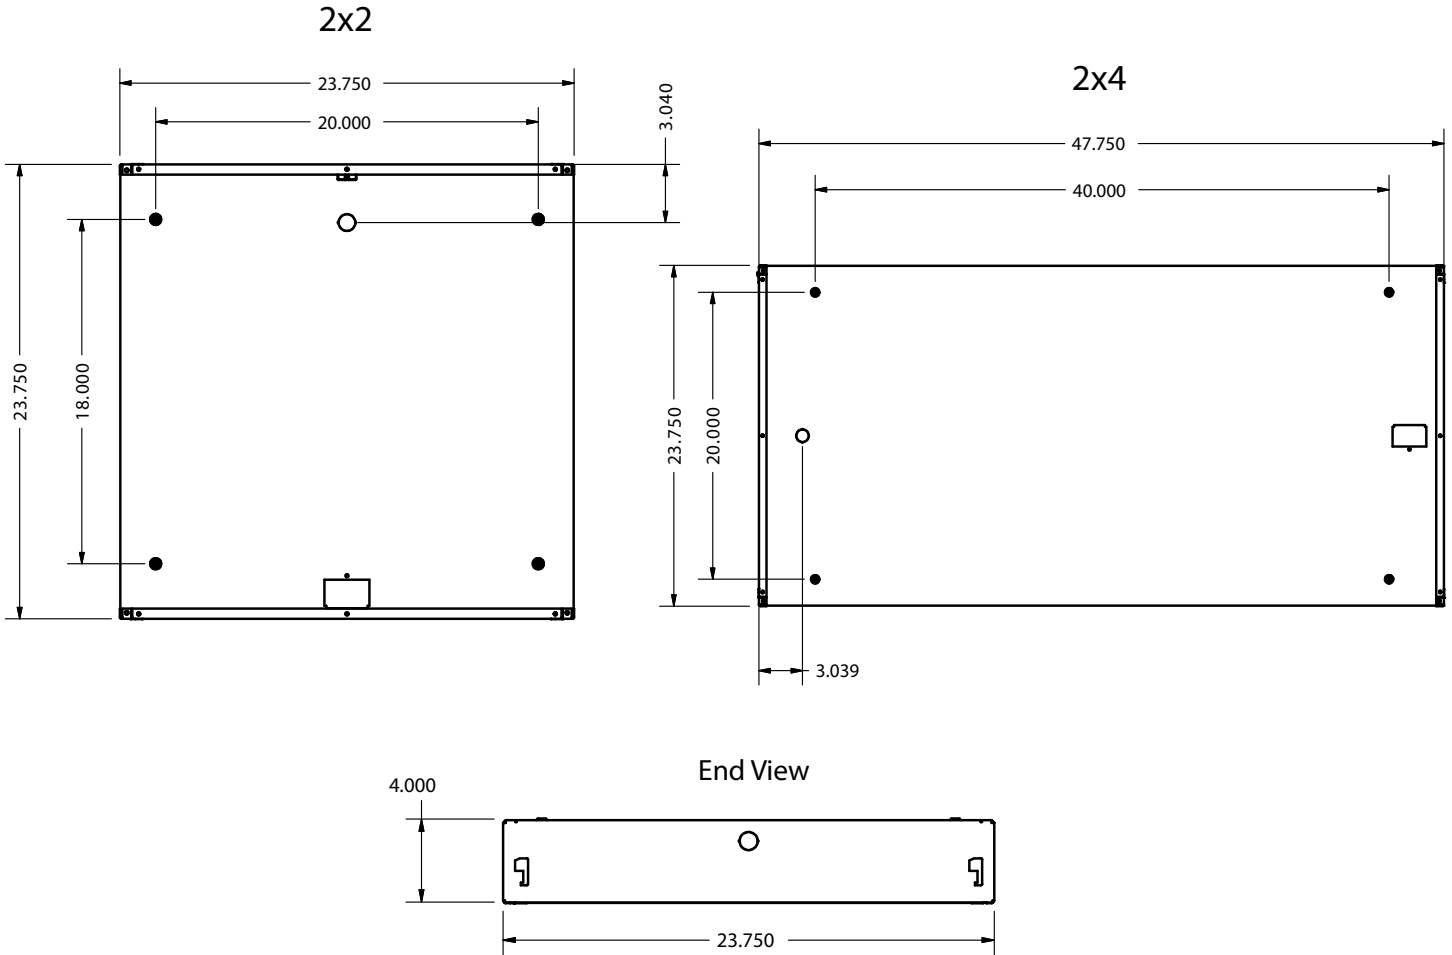

Lumen/Wattage Chart - 4000K

	Low	Medium	High
2x2	2340 Lu/21W	3230 Lu/30W	3986 Lu/38W
2x4	4680 Lu/42W	6459 Lu/59W	7972 Lu/75W